

Masonry Drilling Tools

REVISED JAN 2026



ICS | USA

511 Main Street • Casco, WI 54205-0125 USA
(920) 837-2526 • Fax (920) 837-2530
www.icscuttingtools.com • info@icscuttingtools.com

TABLE OF CONTENTS

Drills

Core Drills

Percussion Hammer Core Drills.....	8
Pilot Drill.....	8
Shanks.....	8
Thin Wall Core Drills	7
Pilot Drill.....	7
Shanks.....	7

Wet Drilling Diamond Core Drills	6
--	---

Extractor Drills - Left Hand	2
------------------------------------	---

Glass Drills.....	11
-------------------	----

Hard Steel Drills.....	2
------------------------	---

Masonry Drills

Fast Spiral	9
Wide Spiral	10
Metric	11

Masonry Hammer

Straight Shank.....	12
3/8" Hex Shank	23
9/16" Hex Shank	23
3/4" Hex Shank	24
19mm Hex Shank	25
21mm Hex Shank	25
2 Slot Shank	16
4 Slot Shank	16

SDS-MAX

Single Cutter.....	17
Multi-Cutter	18

SDS Shank.....	14
----------------	----

Spline Shank

Single Cutter.....	19
Multi-Cutter	20

Universal Drills.....	1
-----------------------	---

“Yankee” (Push) Drills	11
------------------------------	----

Index

Rotary Hammer Drill Index	28-29
---------------------------------	-------

Adapters

Masonry Drill Ejector Key	8
---------------------------------	---

SDS Shank Quick Release Adapters	15
--	----

Taper Chuck Adapters.....	22
---------------------------	----

Bits

Core Bits

Percussion Hammer Core Drills.....	8
------------------------------------	---

For Thin Wall Core Drills	7
---------------------------------	---

Masonry Hammer Bits

“A” Taper Shank	21
-----------------------	----

“B” Taper Shank	21
-----------------------	----

Masonry (Rotary) Core Drill Bits	5
--	---

Pilot Drill	5
-------------------	---

Shanks.....	5
-------------	---

Tapcon Bits - Tang Style Straight Shank	13
---	----

Tapcon Hex Rotary Hammer Bits - SDS-Plus.....	13
---	----

Chisels

Electric Hammer Chisels

Asphalt Cutter 5"	27
-------------------------	----

Bull (Moil) Point	26
-------------------------	----

Bushing Tools	27
---------------------	----

Clay Spade 5-1/2"	27
-------------------------	----

Flat (Cold) Chisel.....	27
-------------------------	----

Ground Rod Driver	27
-------------------------	----

Mortar (Seam) Chisel.....	27
---------------------------	----

Scaling Chisel.....	26
---------------------	----

Slotting Tool.....	27
--------------------	----

Cutters

Plate Cutters	3
---------------------	---

Adapters	3
----------------	---

Rebar Cutters.....	4
--------------------	---

Adapters	4
----------------	---

Sets

Masonry Drill	9
---------------------	---

Masonry Drill (SDS Shank)	14
---------------------------------	----

Universal Drill	1
-----------------------	---

CARBIDE TIPPED UNIVERSAL DRILLS

ICS WIS

HEAVY DUTY

PERCUSSION DRILL POINT



Carbide Tipped Universal Drills are designed with a diamond ground special drill point for multi-purpose drilling. It is highly effective for drilling hard metals and alloys, reinforced concrete, stone, tile, ceramics, marble, granite, glass, hard and soft woods, plastics and many other difficult materials. Often used to drill out broken taps and hardened bolts. They are also known as Carbide Tipped Multi-Purpose Drills or Carbide Tipped Utility Drills.

SIZE	SHANK DIA.	OVERALL LENGTH	ITEM NO.	PRICE
1/8	1/8	3	CTUD008	8.00
1/8	1/8	12	CTUD008X12	12.70
5/32	5/32	3-1/8	CTUD010	8.96
3/16	3/16	3-1/2	CTUD012	8.54
3/16	3/16	12	CTUD012X12	13.30
7/32	7/32	3-3/4	CTUD014	8.96
1/4	1/4	4	CTUD016X04	9.06
1/4	1/4	6	CTUD016X06	9.42
1/4	1/4	12	CTUD016X12	15.14
9/32	1/4	4-1/4	CTUD018	10.08
5/16	1/4	4-1/2	CTUD020	10.70
5/16	1/4	6	CTUD020X06	10.84
11/32	1/4	5	CTUD022	11.96
3/8	3/8	5	CTUD024	12.78
3/8	3/8	12	CTUD024X12	22.84

SIZE	SHANK DIA.	OVERALL LENGTH	ITEM NO.	PRICE
13/32	3/8	6	CTUD026	14.46
13/32	3/8	12	CTUD026X12	27.06
7/16	3/8	6	CTUD028	17.04
7/16	3/8	12	CTUD028X12	29.64
15/32	3/8	6	CTUD030	21.36
15/32	3/8	12	CTUD030X12	33.96
1/2	3/8	6	CTUD032	26.50
1/2	3/8	12	CTUD032X12	39.52
9/16	3/8	6	CTUD036	30.08
9/16	3/8	16	CTUD036X16	64.76
5/8	3/8	6	CTUD040	38.08
3/4	3/8	6	CTUD048	52.32
3/4	1/2	16	CTUD048X16	91.44
7/8	1/2	6	CTUD056	64.06
1	1/2	6	CTUD100	67.00


METRIC SIZES

SIZE	SHANK DIA.	OVERALL LENGTH	ITEM NO.	PRICE
M4.0	M4.0	3	CTUDM04.0X03	8.38
M5.0	M5.0	3-3/8	CTUDM05.0X03	8.38
M6.0	M6.0	3-13/16	CTUDM06.0X03	9.92
M7.0	M7.0	4-3/16	CTUDM07.0X04	11.14


SIZE	SHANK DIA.	OVERALL LENGTH	ITEM NO.	PRICE
M8.0	M8.0	4-9/16	CTUDM08.0X04	11.60
M10.0	M10.0	5-3/8	CTUDM10.0X05	16.72
M12.0	M12.0	6-3/16	CTUDM12.0X06	25.70

UNIVERSAL DRILL APPLICATIONS


HARDENED STEEL & CAST IRON




CONCRETE & GRANITE




CERAMIC TILE & MARBLE




PORCELAIN & BAKED CERAMIC



GLASS, CRYSTAL & MIRROR



WOODS & PLASTICS



CARBIDE TIPPED UNIVERSAL DRILL SET

METAL INDEX

ILLUSTRATION	TYPE OF STEP DRILL	ITEM NO.	PRICE
<p>7 PC DRILL SET</p>	<p>7 pc Carbide Tipped Universal Drill Set contains 1 each: 1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2</p>	DS-CTUD-7	105.76

CARBIDE TIPPED HARD STEEL DRILLS

ICS USA
HEAVY DUTY
130° POINT


Carbide Tipped Hard Steel Drills with Right Hand Cut are designed for all hardened steel drilling applications, such as dies, bearing races, and safes. Specially tempered high speed steel body with long carbide tip to prevent chipping. Ideal for locksmiths, mechanics, etc. Left Hand Cut, **CTHSDL**, are often used to remove broken bolts. Bolt is backed out of the hole by its counter-clockwise spin. Drill diameter tolerances are +.000 -0.0197.

Right Hand Cut

DEC. SIZE	SHANK EQUIV.	OVERALL DIA	OVERALL LENGTH	ITEM NO.	PRICE
1/8	.0625	1/8	2-3/4	CTHSD008X02	11.28
5/32	.0937	5/32	3	CTHSD010X03	13.38
11/64	.1250	11/64	3	CTHSD011X03	13.82
3/16	.1562	3/16	3	CTHSD012X03	11.68
7/32	.1875	7/32	4	CTHSD014X04	15.60
1/4	.2188	1/4	4	CTHSD016X04	14.28
1/4	.2500	1/4	6	CTHSD016X06	15.02
9/32	.2812	9/32	4	CTHSD018X04	15.96
5/16	.3125	1/4	4	CTHSD020X04	15.60

DEC. SIZE	SHANK EQUIV.	OVERALL DIA	OVERALL LENGTH	ITEM NO.	PRICE
5/16	.3125	5/16	6	CTHSD020X06	16.36
3/8	.3438	1/4	4	CTHSD024X04	16.24
3/8	.3750	3/8	6	CTHSD024X06	17.26
13/32	.4062	3/8	6	CTHSD026X06	23.12
7/16	.4375	3/8	6	CTHSD028X06	21.48
1/2	.4687	1/2	6	CTHSD032X06	24.66
9/16	.5000	1/2	6	CTHSD036X06	36.40
5/8	.6250	1/2	6	CTHSD040X06	37.10



Left Hand Cut Extractor

DEC. SIZE	SHANK EQUIV.	OVERALL DIA	OVERALL LENGTH	ITEM NO.	PRICE
1/8	.0625	1/8	2-3/4	CTHSDL008X02	11.96
3/16	.1562	3/16	3	CTHSDL012X03	13.64
1/4	.2188	1/4	4	CTHSDL016X04	15.14
1/4	.2500	1/4	6	CTHSDL016X06	15.78
5/16	.3125	1/4	4	CTHSDL020X04	16.40

DEC. SIZE	SHANK EQUIV.	OVERALL DIA	OVERALL LENGTH	ITEM NO.	PRICE
5/16	.3125	5/16	6	CTHSDL020X06	17.00
3/8	.3438	1/4	4	CTHSDL024X04	17.28
3/8	.3750	3/8	6	CTHSDL024X06	19.48
7/16	.4375	3/8	6	CTHSDL028X06	23.00
1/2	.4687	1/2	6	CTHSDL032X06	24.96

NOTE: Carbide Tipped Universal Drills (**CTUD**) for drilling hardened steel & cast iron are also available.

CARBIDE TIPPED PLATE CUTTERS

ICS USA

HEAVY DUTY

MULTI-TOOTH



WET OR DRY USE

Carbide Tipped Plate Cutters are designed with a multi-tooth center head for drilling through a combination of concrete and steel plates well as embedded rebar and wire mesh. They can be run wet using a small amount of water or run dry. Carbide tipped plate cutters are a viable alternative to fragile diamond core drills as they will withstand rough usage. They can be used with either vacuum or magnetic based diamond drilling machines.

OVERALL SIZE	HUB LENGTH	HUB THREAD SIZE	ITEM NO.	PRICE
1/2	12	5/8-11	CTPC032X12	43.52
5/8	12	5/8-11	CTPC040X12	55.28
3/4	12	5/8-11	CTPC048X12	63.50
7/8	12	5/8-11	CTPC056X12	66.82

OVERALL SIZE	HUB LENGTH	HUB THREAD SIZE	ITEM NO.	PRICE
1	12	5/8-11	CTPC100X12	69.64
1-1/8	12	5/8-11	CTPC108X12	88.92
1-1/4	12	5/8-11	CTPC116X12	94.68
1-1/2	12	5/8-11	CTPC132X12	105.02

Sizes up to 12" diameter available upon request.

PLATE CUTTER ADAPTER



Adapts plate cutters for use in any 1/2" rotary style drill with a Jacobs (three-jaw) style chuck.

DESCRIPTION	ITEM NO.	PRICE
1/2" Round Shank to 5/8 - 11	CTPCA040-11	26.26
1/2" Round Shank to 1-1/4 - 7	CTPCA116-07	58.80




SUGGESTED DRILL SPEEDS FOR PLATE CUTTERS		
SIZES	HUB THREAD SIZE	RPM
1/2 - 1-3/8	5/8 - 11	500 - 1200 RPM
1-1/2	5/8 - 11	350 - 750 RPM
1-3/4 - 12	1-1/4 - 7	150 - 300 RPM

CARBIDE TIPPED REBAR CUTTERS

ICS USA

HEAVY DUTY

MULTI-TOOTH



Carbide Tipped Rebar Cutters are designed with a multi-tooth cutter head for drilling through concrete and embedded rebar or wire mesh. Use either water or cutting oil for lubrication and cooling. They can be used in any 1/2" rotary drill with a 3-jawed chuck or directly into SDS, Spline Drive, or SDS-Max Hammer Drills using an ICS rebar cutter adapter.





OVERALL		HUB THREAD	ITEM	
SIZE	LENGTH	SIZE	NO.	PRICE
1/2	12	5/8-11	CTRC032X12	46.46
5/8	12	5/8-11	CTRC040X12	58.80
3/4	12	5/8-11	CTRC048X12	68.22
7/8	12	5/8-11	CTRC056X12	71.16

OVERALL		HUB THREAD	ITEM	
SIZE	LENGTH	SIZE	NO.	PRICE
1	12	5/8-11	CTRC100X12	75.26
1-1/8	12	5/8-11	CTRC108X12	95.26
1-1/4	12	5/8-11	CTRC116X12	101.72
1-1/2	12	5/8-11	CTRC132X12	112.90

Sizes up to 3" diameter available upon request.


REBAR CUTTER ADAPTERS

Adapts rebar and plate cutters for use in various style masonry drills.


ILLUSTRATION	FITS	ITEM NO.	PRICE
	1/2" Rotary Style Drills	RCA-RS	31.50
	SDS Hammer Drills	RCA-SDS	55.28
	Spline Drive Hammer Drills	RCA-S	66.44
	SDS-Max Hammer Drills	RCA-MAX	75.86

HOW TO DRILL REBAR


1. Stop drilling as soon as carbide tip comes in contact with rebar. (If you do not - drill will be damaged.)



2. Replace carbide tipped drill with rebar cutter. Insert into hole and drill through embedded rebar. (Maintain even and constant pressure.)



3. Replace rebar cutter with carbide tipped drill and finish drilling the hole.



NOTICE


Rebar cutters can also be used in most hammer drills equipped with a three-jaw style chuck, provided the selector is kept in the rotary-only position. Percussion (hammering action) will damage the tool. The ICS Rebar Cutter is designed for rotary drilling only.

MASONRY (ROTARY) CORE DRILL BITS

ICS USA

GENERAL PURPOSE

MULTI-TOOTH

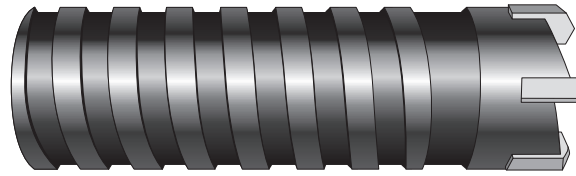

Carbide Tipped Rotary Core Drill Bits are designed for drilling large diameter holes in thin or brittle material that would be damaged if done with a hammer core drill. Carbide tipped teeth cut only the rim of the hole leaving the core intact which should be broken up and removed every 4" for maximum drilling depth.

OVERALL SIZE	SHANK LENGTH	SHANK SIZE	ITEM NO.	PRICE
1/2	6	3/8	MD-RC032X06	27.54
5/8	8	3/8	MD-RC040X08	33.66
3/4	10	1/2	MD-RC048X10	40.94
7/8	10	1/2	MD-RC056X10	57.88
1	10	1/2	MD-RC100X10	63.50
1-1/8	12	1/2	MD-RC108X12	69.38

OVERALL SIZE	SHANK LENGTH	SHANK SIZE	ITEM NO.	PRICE
1-1/4	12	1/2	MD-RC116X12	78.34
1-3/8	12	1/2	MD-RC124X12	84.08
1-1/2	12	1/2	MD-RC132X12	94.56
1-7/8	12	1/2	MD-RC156X12	115.84
2	12	3/4	MD-RC200X12	124.26

ROTARY CORE PILOT DRILL



Use a pilot drill for a more accurate starting position and to keep the drill from walking. The pilot drill is used only to start the initial starting groove and is then removed before drilling is continued.

FITS DRILL SIZE	ITEM NO.	PRICE
5/8 to 1	MD-RCPD #1	6.92
1-1/8 to 2-1/4	MD-RCPD #2	6.92

ROTARY CORE SHANKS

EXTRA LONG



OVERALL SIZE	SHANK LENGTH	SHANK SIZE	ITEM NO.	PRICE
3/8	12	3/8-16	MD-RCS024X12	5.06
3/8	18	3/8-16	MD-RCS024X18	7.48
1/2	12	1/2-13	MD-RCS032X12	5.66
1/2	18	1/2-13	MD-RCS032X18	7.72
3/4	12	3/4-10	MD-RCS048X12	11.22
3/4	18	3/4-10	MD-RCS048X18	54.68

MASONRY (WET DRILLING) DIAMOND CORE DRILLS

ICS USA
SPECIAL PURPOSE
DIAMOND SEGMENTS
**PREMIUM
GRADE**

**13" DRILLING
DEPTH**

Wet Drilling Diamond Core Drills are used for cutting miscellaneous types of concrete, masonry, and stone. They are made to cool from the center and should be used in either vacuum or magnetic based diamond drilling machines. Use either water or cutting oil for lubrication and cooling. Do not use dry or use in a hammer drill.

SIZE	SEGMENT SIZES	ITEM NO.	PRICE
1	.118 x .275	MD-DCWP0100	57.76
1-1/8	.118 x .275	MD-DCWP0108	57.76
1-1/4	.118 x .275	MD-DCWP0116	61.60
1-3/8	.118 x .275	MD-DCWP0124	63.52
1-1/2	.157 x .275	MD-DCWP0132	65.46
1-5/8	.157 x .275	MD-DCWP0140	77.02
1-3/4	.157 x .275	MD-DCWP0148	84.70
1-7/8	.157 x .275	MD-DCWP0156	88.56
2	.157 x .275	MD-DCWP0200	96.24
2-1/4	.157 x .275	MD-DCWP0216	100.12
2-1/2	.177 x .275	MD-DCWP0232	115.50
2-3/4	.177 x .275	MD-DCWP0248	127.06
3	.177 x .275	MD-DCWP0300	134.76
3-1/4	.177 x .275	MD-DCWP0316	146.32
3-1/2	.177 x .275	MD-DCWP0332	165.54
4	.197 x .275	MD-DCWP0400	180.96
4-1/4	.197 x .275	MD-DCWP0416	188.64
4-1/2	.197 x .275	MD-DCWP0432	204.06
5	.217 x .275	MD-DCWP0500	219.46
5-1/4	.217 x .275	MD-DCWP0516	234.54
5-1/2	.217 x .275	MD-DCWP0532	242.56
5-3/4	.217 x .275	MD-DCWP0548	246.40
6	.217 x .275	MD-DCWP0600	250.26
6-1/4	.217 x .275	MD-DCWP0616	300.30
6-1/2	.217 x .275	MD-DCWP0632	365.76
7	.217 x .275	MD-DCWP0700	385.00
8	.217 x .275	MD-DCWP0800	415.80
9	.217 x .275	MD-DCWP0900	485.10
10	.217 x .275	MD-DCWP1000	535.14
11	.217 x .275	MD-DCWP1100	750.76
12	.236 x .275	MD-DCWP1200	762.30
13	.236 x .275	MD-DCWP1300	954.82
14	.236 x .275	MD-DCWP1400	954.82
16	.236 x .275	MD-DCWP1600	CALL

1" to 1-3/4" Diamond Core Drills have a 5/8 - 11 thread.
2" to 18" Diamond Core Drills have a 1-1/4 - 7 thread.

Dry Drilling Diamond Core Drills and Diamond Core Drill
Machines are available upon request.


MASONRY (THIN WALL) CORE DRILLS

ICS USA

HEAVY DUTY

MULTI-TOOTH

SCREW TOGETHER
STYLE



3 PC
ASSEMBLY

Special Carbide Tipped Thin Wall Percussion Core Bits are designed to drill large diameter holes with most rotary hammer drills. Carbide tips can withstand continuous hammering action and give maximum drilling life.

CORE BITS FOR THIN WALL CORE DRILLS

ILLUSTRATION	SIZE	BODY LENGTH	NO. OF TEETH	ITEM NO.	PRICE
 THIN WALL CORE BODY	1-1/2	4	6	MD-TWC132	112.08
	1-3/4	4	6	MD-TWC148	130.54
	2	4	6	MD-TWC200	139.02
	2-1/2	4	9	MD-TWC232	171.28
	3	4	9	MD-TWC300	206.74
	3-1/2	4	9	MD-TWC332	257.12
	4	4	9	MD-TWC400	294.84

SHANKS FOR THIN WALL CORE DRILLS

ILLUSTRATION	LENGTH	FITS HAMMER MODEL	ITEM NO.	PRICE
	12" 18"	Fits all Popular Spline Drive Power Tools. See pages 162- 163 for complete listing.	MD-TWCS 12SP MD-TWCS 18SP	74.68 89.76
	12" 18"	Bosch 11216, SDS-MAX Hilti TE 64, TE-Y Hilti TE 72, 90	MD-TWCS 12MAX MD-TWCS 18MAX	79.16 99.38
 Only fits 1-1/2" diameter core drills	8" 16"	Fits all popular 4 slot power tools. See pages 162- 163 for complete listing.	MD-TWCS 08SDS MD-TWCS 16SDS	61.74 85.86
 Fits 1-3/4" to 4" diameter core drills	8" 12"	Fits all popular 4 slot power tools. See pages 162- 163 for complete listing.	MD-TWCS 08SDSL MD-TWCS 12SDSL	65.86 75.26

PILOT DRILL FOR THIN WALL CORE DRILLS


ILLUSTRATION	CUTTING APPLICATION	ITEM NO.	PRICE
	Use a pilot drill for a more accurate starting position and to keep the hammer core drill from walking. The pilot drill is used only to start the initial starting groove and is then removed before drilling is continued.	MD-TWCSPD	20.58

MASONRY (PERCUSSION HAMMER) CORE DRILLS

ICS WIS

HEAVY DUTY

MULTI-TOOTH

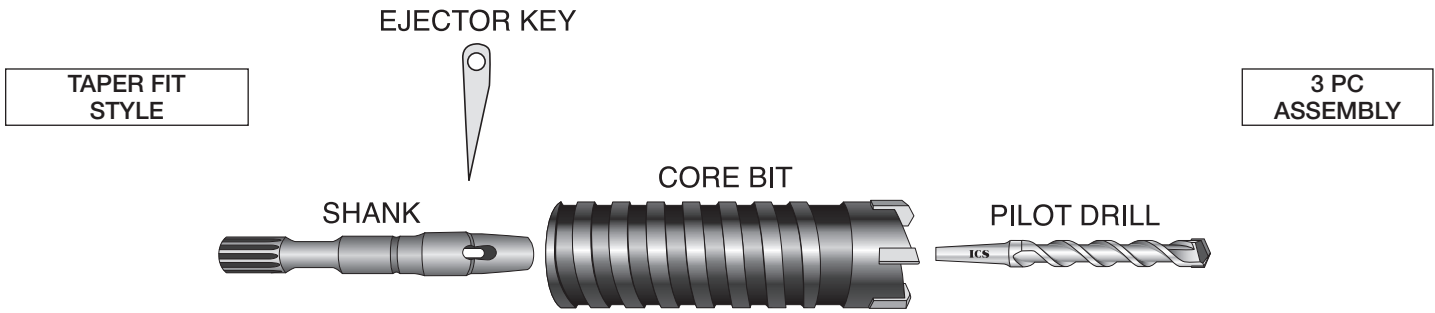

Special Carbide Tipped Percussion Core Bits are designed to drill large diameter holes with most rotary hammer drills. Carbide Tips can withstand continuous hammering action and give maximum drilling life.

CORE BITS FOR PERCUSSION HAMMER CORE DRILLS

ILLUSTRATION	SIZE	BODY LENGTH	NO. OF TEETH	ITEM NO.	PRICE
<p>TAPERED CORE BODY</p>	1-1/2	4	6	MD-PC132	125.58
	2	4	6	MD-PC200	137.56
	2-1/2	4	9	MD-PC232	154.56
	3	4	9	MD-PC300	195.30
	3-1/2	4	9	MD-PC332	221.02
	4	4	9	MD-PC400	288.98
	5	4	12	MD-PC500	405.72

SHANKS FOR PERCUSSION HAMMER CORE DRILLS

ILLUSTRATION	LENGTH	FITS HAMMER MODEL	ITEM NO.	PRICE
	8" 22"	Fits all Popular Spline Drive See pages 162- 163 for complete listing.	MD-PCS08SP MD-PCS22SP	77.28 95.14
	8" 18"	Bosch 11216, SDS-MAX Hilti TE 64, TE-Y, Hilti TE 72, 90	MD-PCS08MAX MD-PCS18MAX	76.28 93.14


PERCUSSION CORE PILOT DRILL



Use a pilot drill for a more accurate starting position and to keep the hammer core drill from walking. The pilot drill is used only to start the initial starting groove and is then removed before drilling is continued.

SIZE AND DESCRIPTION	ITEM NO.	PRIC
3/8 x 5 A-Taper Shank	MD-PCPD	11.72

MASONRY DRILL EJECTOR KEY



Use Ejector Key to push Pilot Drill out of Tapered Core Body.

ITEM NO.	PRICE
MD-EK	6.96

CARBIDE TIPPED MASONRY DRILLS - FAST SPIRAL

ICS USA

GENERAL PURPOSE

ROTARY DRILL POINT



BLACK FINISH



ZINC PLATED

Carbide Tipped Fast Spiral Masonry Drill Bits are designed for rotary drilling into brick, cinder block, tile, plaster, and other brittle materials. Brittle materials will require slower speeds and light to moderate pressure as material is being ground, not broken. The fast spiral flute design creates less heat buildup when drilling. A special carbide tip with a 130° point and positive angle provides fast penetration. They can be used in any 3-jaw chuck rotary style drill.

NOMINAL		SHANK	BLACK FINISH		ZINC PLATED	
SIZE	LENGTH	SIZE	ITEM NO.	PRICE	ITEM NO.	PRICE
1/8	3	1/8	MDF008X03	1.90	MDFZ008X03	1.90
3/16	4	3/16	MDF012X04	2.02	MDFZ012X04	2.02
1/4	4	1/4	MDF016X04	2.26	MDFZ016X04	2.26
1/4	6	1/4	MDF016X06	2.84	MDFZ016X06	2.84
1/4	13	1/4	MDF016X13	7.06	MDFZ016X13	7.06
5/16	4	1/4	MDF020X04	2.60	MDFZ020X04	2.60
5/16	6	1/4	MDF020X06	3.20	MDFZ020X06	3.20
5/16	13	1/4	MDF020X13	7.78	MDFZ020X13	7.78
3/8	4	1/4	MDF024X04	3.30	MDFZ024X04	3.30
3/8	6	1/4	MDF024X06	3.78	MDFZ024X06	3.78
3/8	13	1/4	MDF024X13	8.72	MDFZ024X13	8.72
7/16	6	1/4	MDF028X06	4.38	MDFZ028X06	4.38

NOMINAL		SHANK	BLACK FINISH		ZINC PLATED	
SIZE	LENGTH	SIZE	ITEM NO.	PRICE	ITEM NO.	PRICE
1/2	4	1/4	MDF032X04	4.12	MDFZ032X04	4.12
1/2	6	1/4	MDF032X06	4.96	MDFZ032X06	4.96
1/2	13	3/8	MDF032X13	11.76	MDFZ032X13	11.76
9/16	6	3/8	MDF036X06	6.82	MDFZ036X06	6.82
9/16	13	3/8	MDF036X13	12.94	MDFZ036X13	12.94
5/8	6	3/8	MDF040X06	7.32	MDFZ040X06	7.32
5/8	13	3/8	MDF040X13	14.84	MDFZ040X13	14.84
3/4	6	1/2	MDF048X06	11.66	MDFZ048X06	11.66
3/4	13	1/2	MDF048X13	18.82	MDFZ048X13	18.82
7/8	6	1/2	MDF056X06	15.88	MDFZ056X06	15.88
1	6	1/2	MDF100X06	18.24	MDFZ100X06	18.24

PACKAGING: 1 drill/vinyl pouch or plastic tube

MASONRY DRILL SETS AND DISPLAYS

ILLUSTRATION	DESCRIPTION	TYPE OF DRILL	ITEM NO.	PRICE
	4 PC DRILL SET 1/4, 5/16, 3/8, 1/2 4" Long Masonry Drills Vinyl Pouch Package	Fast Spiral Masonry Drills Wide Spiral Masonry Drills	MDS-MDF-04 MDS-MDW-04	- -
		30 PC DRILL DISPLAY 5 ea. 1/8, 3/16, 1/4, 5/16, 3/8, 1/2 4" Length Masonry Drills Display Size: 12" x 10-1/2"	Fast Spiral Masonry Drills Wide Spiral Masonry Drills	MDD-MDF-304 MDD-MDW-304
18 PC DRILL DISPLAY 3 ea. 1/4, 5/16, 3/8, 1/2, 5/8, 3/4 6" Length Masonry Drills Display Size: 12" x 12"		Fast Spiral Masonry Drills Wide Spiral Masonry Drills	MDD-MDF-186 MDD-MDW-186	106.78 106.78
30 PC DRILL DISPLAY 3 ea. 1/8, 3/16, 1/4, 5/16, 3/8 3 ea. 7/16, 1/2, 9/16, 5/8, 3/4 6" Length Masonry Drills Display Size: 18" x 12"		Fast Spiral Masonry Drills Wide Spiral Masonry Drills	MDD-MDF-306 MDD-MDW-306	155.00 155.00
6 PC DRILL DISPLAY 1 ea. 1/4, 5/16, 3/8, 1/2, 5/8, 3/4 13" Length Masonry Drills Display Size: 12" x 18"		Fast Spiral Masonry Drills Wide Spiral Masonry Drills	MDD-MDF-613 MDD-MDW-613	77.62 77.62
6 PC DRILL DISPLAY 1 ea. 1/4, 5/16, 3/8, 1/2, 5/8, 3/4 18" Length Masonry Drills Display Size: 12" x 23"		Wide Spiral Masonry Drills	MDD-MDW-618	110.54

* 1/8" Masonry Drill in MDD-306 Display is 3" long, not 6".

CARBIDE TIPPED MASONRY DRILLS - WIDE SPIRAL


ICS USA

GENERAL PURPOSE

ROTARY DRILL POINT



BLACK FINISH



ZINC PLATED

Carbide Tipped Wide Spiral Masonry Drill Bits are designed for rotary drilling into concrete, masonry, marble, stone and rock. The harder the material, the more pressure applied and the slower the speed as material is being ground up, not broken as a hammer drill would do. The wide spiral flute design is very strong and removes debris rapidly. A special carbide tip with a 130° point and positive angle provides fast penetration. They can be used in any 3-Jaw chuck rotary style drill. They are also known as Carbide Tipped Slow Spiral Masonry Drill Bits.

NOMINAL		SHANK	BLACK FINISH		ZINC PLATED	
SIZE	LENGTH	SIZE	ITEM NO.	PRICE	ITEM NO.	PRICE
1/8	3	1/8	MDW008X03	1.90	MDWZ008X03	1.90
5/32	3	9/64	MDW010X03	1.90	MDWZ010X03	1.90
11/64	3	9/64	MDW011X03	1.90	MDWZ011X03	1.90
3/16	4	3/16	MDW012X04	2.02	MDWZ012X04	2.02
3/16	6	3/16	MDW012X06	2.60	MDWZ012X06	2.60
7/32	4	3/16	MDW014X04	2.12	MDWZ014X04	2.12
15/64	4	3/16	MDW015X04	2.26	MDWZ015X04	2.26
1/4	4	1/4	MDW016X04	2.26	MDWZ016X04	2.26
1/4	6	1/4	MDW016X06	2.84	MDWZ016X06	2.84
1/4	13	1/4	MDW016X13	7.06	MDWZ016X13	7.06
1/4	18	1/4	MDW016X18	12.36	MDWZ016X18	12.36
1/4	24	1/4	MDW016X24	13.52	MDWZ016X24	13.52
1/4	30	1/4	MDW016X30	15.30	MDWZ016X30	15.30
9/32	4	1/4	MDW018X04	2.60	MDWZ018X04	2.60
5/16	4	1/4	MDW020X04	2.60	MDWZ020X04	2.60
5/16	6	1/4	MDW020X06	3.20	MDWZ020X06	3.20
5/16	13	1/4	MDW020X13	7.78	MDWZ020X13	7.78
5/16	18	1/4	MDW020X18	13.52	MDWZ020X18	13.52
5/16	24	1/4	MDW020X24	20.16	MDWZ020X24	20.16
5/16	30	1/4	MDW020X30	23.08	MDWZ020X30	23.08
3/8	4	1/4	MDW024X04	3.30	MDWZ024X04	3.30
3/8	6	1/4	MDW024X06	3.78	MDWZ024X06	3.78
3/8	6	3/8	MDW024X06A	3.78	MDWZ024X06A	3.78
3/8	13	1/4	MDW024X13	14.12	MDWZ024X13	14.12
3/8	18	3/8	MDW024X18	14.12	MDWZ024X18	14.12
3/8	24	3/8	MDW024X24	15.88	MDWZ024X24	15.88
3/8	30	3/8	MDW024X30	18.00	MDWZ024X30	18.00
7/16	4	1/4	MDW028X04	3.78	MDWZ028X04	3.78
7/16	6	1/4	MDW028X06	4.38	MDWZ028X06	4.38
7/16	6	3/8	MDW028X06A	4.38	MDWZ028X06A	4.38
7/16	13	3/8	MDW028X13	10.58	MDWZ028X13	10.58
7/16	18	3/8	MDW028X18	14.70	MDWZ028X18	14.70

NOMINAL		SHANK	BLACK FINISH		ZINC PLATED	
SIZE	LENGTH	SIZE	ITEM NO.	PRICE	ITEM NO.	PRICE
1/2	4	1/4	MDW032X04	4.12	MDWZ032X04	4.12
1/2	6	1/4	MDW032X06	4.96	MDWZ032X06	4.96
1/2	6	3/8	MDW032X06A	4.96	MDWZ032X06A	4.96
1/2	13	3/8	MDW032X13	11.76	MDWZ032X13	11.76
1/2	18	3/8	MDW032X18	17.06	MDWZ032X18	17.06
1/2	24	3/8	MDW032X24	19.40	MDWZ032X24	19.40
1/2	30	3/8	MDW032X30	22.34	MDWZ032X30	22.34
9/16	6	3/8	MDW036X06	6.82	MDWZ036X06	6.82
9/16	13	1/2	MDW036X13	12.94	MDWZ036X13	12.94
9/16	18	1/2	MDW036X18	18.24	MDWZ036X18	18.24
5/8	6	3/8	MDW040X06	7.32	MDWZ040X06	7.32
5/8	13	1/2	MDW040X13	14.84	MDWZ040X13	14.84
5/8	18	1/2	MDW040X18	20.58	MDWZ040X18	20.58
11/16	6	1/2	MDW044X06	10.58	MDWZ044X06	10.58
3/4	6	3/8	MDW048X06	11.66	MDWZ048X06	11.66
3/4	6	1/2	MDW048X06A	11.66	MDWZ048X06A	11.66
3/4	13	1/2	MDW048X13	18.82	MDWZ048X13	18.82
3/4	18	1/2	MDW048X18	23.08	MDWZ048X18	23.08
7/8	6	1/2	MDW056X06	15.88	MDWZ056X06	15.88
7/8	13	1/2	MDW056X13	24.70	MDWZ056X13	24.70
7/8	18	1/2	MDW056X18	34.82	MDWZ056X18	34.82
1	6	1/2	MDW100X06	18.24	MDWZ100X06	18.24
1	13	1/2	MDW100X13	30.00	MDWZ100X13	30.00
1	18	1/2	MDW100X18	42.92	MDWZ100X18	42.92
1-1/8	6	1/2	MDW108X06	23.30	MDWZ108X06	23.30
1-1/8	10	1/2	MDW108X10	49.88	MDWZ108X10	49.88
1-1/4	10	1/2	MDW116X10	56.78	MDWZ116X10	56.78
1-1/4	18	1/2	MDW116X18	64.68	MDWZ116X18	64.68
1-3/8	10	1/2	MDW124X10	30.94	MDWZ124X10	30.94
1-3/8	18	1/2	MDW124X18	69.30	MDWZ124X18	69.30
1-1/2	10	1/2	MDW132X10	57.96	MDWZ132X10	57.96
1-1/2	18	1/2	MDW132X18	87.02	MDWZ132X18	87.02

PACKAGING

1/8 x 3" to 3/4 x 18" Length - 1 Drill/Vinyl Pouch
 7/8 x 6" up to 1-1/2 x 18" Length - 1 Drill/Tube
 1/4 x 24" up to 1/2 x 30" Length - 1 Drill/Tube


**CARBIDE TIPPED
MASONRY DRILLS - METRIC**

ICS USA

GENERAL PURPOSE

PERCUSSION DRILL POINT

**ROTARY
STYLE**



**WIDE
SPIRAL**

Carbide Tipped Wide Spiral Metric Masonry Drill Bits are designed for rotary drilling into concrete, masonry, marble, stone and rock. The harder the material, the more pressure applied and the slower the speed as material is being ground up, not broken as a hammer drill would do. The wide spiral flute design is very strong and removes debris rapidly. A special carbide tip with a 130° point and positive angle provides fast penetration. They can be used in any 3-Jaw chuck rotary style drill. ICS Carbide Tipped Metric Drills are true metric sizes (not fractional equivalents) for drilling pilot holes for European Anchors. They are also known as Carbide Tipped Slow Spiral Metric Masonry Drill Bits.

Note: Metric Diameter Drills must be used for drilling metric size anchor holes to ensure proper fit for metric size anchors.

SIZE mm	OVERALL LENGTH	SHANK SIZE	ITEM NO.	PRICE
3	75	2.5	MD-M03.0X075	1.90
3.5	75	3.0	MD-M03.5X075	1.90
4	85	4.0	MD-M04.0X085	1.90
4.5	85	4.0	MD-M04.5X085	1.90
5	85	4.0	MD-M05.0X085	2.02
5.5	100	4.5	MD-M05.5X100	2.12
6	100	4.8	MD-M06.0X100	2.26
6.5	100	5.5	MD-M06.5X100	2.26
7	100	5.5	MD-M07.0X100	2.60
8	120	6.0	MD-M08.0X120	2.60
9	120	7.0	MD-M09.0X120	3.30

SIZE mm	OVERALL LENGTH	SHANK SIZE	ITEM NO.	PRICE
11	150	9.0	MD-M11.0X150	4.38
12	150	9.0	MD-M12.0X150	4.38
13	150	9.5	MD-M13.0X150	4.96
14	150	9.5	MD-M14.0X150	6.82
16	150	12.7	MD-M16.0X150	7.32
18	160	12.7	MD-M18.0X160	12.48
19	150	12.7	MD-M19.0X150	12.48
20	150	12.7	MD-M20.0X150	12.48
22	150	12.7	MD-M22.0X150	15.88
25	160	12.7	MD-M25.0X160	-

**CARBIDE TIPPED
"YANKEE" (PUSH) DRILLS**

SPECIAL PURPOSE



Carbide Tipped Yankee Push Drills are designed to fit Yankee Push Drill systems where 3/16" and 1/4" anchor holes are required. They are ideal for drywall and concrete block.

SIZE	OVERALL LENGTH	ITEM NO.	PRICE
3/16	2-1/8	CTYPD012	4.28

**CARBIDE TIPPED
GLASS DRILLS**

ICS USA

SPECIAL PURPOSE

SPEAR POINT



Carbide Tipped Glass Drills are designed for drilling glass, mirror glass, tile, ceramics, and porcelain. Special spear point allows a precise hole to start without walking and can also be used to drill a hole smaller than drill diameter. For best results, apply firm pressure at low speed, using water or turpentine as a lubricant.

SIZE	OVERALL LENGTH	ITEM NO.	PRICE
1/8	2-1/2	CTGD008	6.82
5/32	2-1/2	CTGD010	7.64
3/16	2-1/2	CTGD012	7.06
1/4	2-1/2	CTGD016	7.96
5/16	2-1/2	CTGD020	9.46
3/8	3	CTGD024	12.84

SIZE	OVERALL LENGTH	ITEM NO.	PRICE
1/2	3	CTGD032	18.36
9/16	4	CTGD036	19.32
5/8	4	CTGD040	21.42
3/4	4	CTGD048	25.62
7/8	4	CTGD056	31.50
1	4	CTGD100	31.50


CARBIDE TIPPED MASONRY HAMMER DRILLS

ICS USA

HEAVY DUTY

PERCUSSION DRILL POINT

DUAL PURPOSE



WIDE SPIRAL

Carbide Tipped Wide Spiral Flute Masonry Hammer Drill Bits are designed for rotary or percussion drilling into concrete, masonry, marble, stone and rock. The impact action and rotation created by the percussion drill breaks up the concrete for faster use and harder materials. A special carbide tip with a 130° point and negative angle provides fast penetration in percussion mode, but drill 10% slower when in rotary mode.

SIZE mm	OVERALL LENGTH	SHANK SIZE	ITEM NO.	PRICE
1/8	3	1/8	MDH008X03	2.12
5/32	3	9/64	MDH010X03	2.12
11/64	3	9/64	MDH011X03	2.12
3/16	4	3/16	MDH012X04	2.26
3/16	6	3/16	MDH012X06	2.94
7/32	4	3/16	MDH014X04	2.48
1/4	4	1/4	MDH016X04	2.60
1/4	6	1/4	MDH016X06	3.20
1/4	13	1/4	MDH016X13	7.64
1/4	18	1/4	MDH016X18	12.94
1/4	24	1/4	MDH016X24	14.12
1/4	30	1/4	MDH016X30	15.88
9/32	4	1/4	MDH018X04	2.94
5/16	4	1/4	MDH020X04	2.94
5/16	6	1/4	MDH020X06	3.54
5/16	13	1/4	MDH020X13	8.36
5/16	18	1/4	MDH020X18	14.12
5/16	24	1/4	MDH020X24	15.88
5/16	30	1/4	MDH020X30	17.90
3/8	4	1/4	MDH024X04	3.66
3/8	6	1/4	MDH024X06	4.12
3/8	6	3/8	MDH024X06A	4.12
3/8	13	1/4	MDH024X13	14.70
3/8	18	3/8	MDH024X18	14.70
3/8	24	3/8	MDH024X24	16.46
3/8	30	3/8	MDH024X30	18.58
7/16	4	1/4	MDH028X04	4.38
7/16	6	1/4	MDH028X06	4.96
7/16	6	3/8	MDH028X06A	4.96
7/16	13	3/8	MDH028X13	CALL

SIZE mm	OVERALL LENGTH	SHANK SIZE	ITEM NO.	PRICE
7/16	18	3/8	MDH028X18	15.88
1/2	4	1/4	MDH032X04	5.30
1/2	6	1/4	MDH032X06	6.14
1/2	6	3/8	MDH032X06A	6.14
1/2	13	3/8	MDH032X13	12.94
1/2	18	3/8	MDH032X18	18.24
1/2	24	3/8	MDH032X24	20.58
1/2	30	3/8	MDH032X30	23.52
9/16	6	3/8	MDH036X06	8.00
9/16	13	1/2	MDH036X13	20.00
9/16	18	1/2	MDH036X18	24.26
5/8	6	3/8	MDH040X06	8.48
5/8	6	1/2	MDH040X06A	8.48
5/8	13	1/2	MDH040X13	16.00
5/8	18	1/2	MDH040X18	21.76
11/16	6	1/2	MDH044X06	11.76
3/4	6	3/8	MDH048X06	12.84
3/4	6	1/2	MDH048X06A	12.84
3/4	13	1/2	MDH048X13	20.00
3/4	18	1/2	MDH048X18	24.26
7/8	6	1/2	MDH056X06	15.88
7/8	13	1/2	MDH056X13	23.52
7/8	18	1/2	MDH056X18	32.94
1	6	1/2	MDH100X06	19.40
1	13	1/2	MDH100X13	30.00
1	18	1/2	MDH100X18	42.46
1-1/8	6	1/2	MDH108X06	26.12
1-1/4	18	1/2	MDH116X18	65.86
1-3/8	18	1/2	MDH124X18	70.56
1-1/2	18	1/2	MDH132X18	88.20

PACKAGING

- 1/8 x 3" to 3/4 x 18" Length - 1 Drill/Vinyl Pouch
- 7/8 x 6" up to 1-1/2 x 18" Length - 1 Drill/Tube
- 1/4 x 24" up to 1/2 x 30" Length - 1 Drill/Tube

Extra Long Carbide Tipped Bellhanger Masonry Drills on page MET-106 of the Metal Cutting Tools Catalog are designed to do very deep hole drilling. Lengths up to 72" are available.

CARBIDE TIPPED

TAPCON® BITS - TANG STYLE - STRAIGHT SHANK

ICS USA

SPECIAL PURPOSE

ROTARY DRILL POINT

STRAIGHT TANG SHANK



WIDE SPIRAL

Carbide Tipped Straight Shank Tapcon Bits are designed for use in Tapcon®, Condrive®, and Black and Decker® drilling systems for setting masonry anchor screws with self-cutting threads. Straight shank Tapcon bits can be used in any drill with a 3-jawed drill chuck. All ICS straight shank Tapcon bits meet or exceed all tolerances recommended by manufacturers of screw-type masonry anchors. They are also known as Screw-Type Anchor Bits or Concrete Screw Drill Bits.

SIZE x LENGTH	FOR THESE SIZE ANCHORS	ITEM NO.	PRICE
5/32 x 3-1/2	3/16 x 1-1/4 3/16 x 1-3/4	MD-TC010X03	2.60
5/32 x 4-1/2	3/16 x 1-3/4 3/16 x 2-1/4 3/16 x 2-3/4	MD-TC010X04	2.94
5/32 x 5-1/2	3/16 x 3-1/4 3/16 x 3-3/4 3/16 x 4	MD-TC010X05	3.20

SIZE x LENGTH	FOR THESE SIZE ANCHORS	ITEM NO.	PRICE
3/16 x 3-1/2	1/4 x 1-1/4 1/4 x 1-3/4	MD-TC012X03	2.72
3/16 x 4-1/2	1/4 x 2-1/4 1/4 x 2-3/4	MD-TC012X04	3.08
3/16 x 5-1/2	1/4 x 3-1/4 1/4 x 3-3/4 1/4 x 4	MD-TC012X05	3.42
3/16 x 6-3/4	1/4 x 5	MD-TC012X06	4.38
3/16 x 7-5/8	1/4 x 6	MD-TC012X07	5.06

CARBIDE TIPPED

TAPCON® HEX ROTARY HAMMER BITS - SDS-PLUS

ICS WIS

SPECIAL PURPOSE

HAMMER DRILL POINT

4 SLOT (SDS) HEX DRIVE SHANK



WIDE SPIRAL

Carbide Tipped SDS-Plus Tapcon Hex Drive Rotary Hammer Bits are designed for use in Tapcon®, Condrive®, and Black and Decker® drilling systems for setting masonry anchor screws with self-cutting threads. SDS-Plus Tapcon hex drive bits have a 5/16" hex directly below the shank which fits into driver sleeve for installation. All ICS SDS-Plus Tapcon hex drive rotary hammer bits meet or exceed all tolerances recommended by manufacturers of screw-type masonry anchors. They are also known as Carbide Tipped Screw-Type Anchor Bits or Carbide Tipped Concrete Screw Drill Bits.

SIZE x LENGTH	FOR THESE SIZE ANCHORS	ITEM NO.	PRICE
5/32 x 5	3/16 x 3-1/4 3/16 x 3-3/4 3/16 x 4	MD-SDSH010X05	12.92
5/32 x 7	3/16 (extra reach)	MD-SDSH010X07	18.82

SIZE x LENGTH	FOR THESE SIZE ANCHORS	ITEM NO.	PRICE
3/16 x 5	1/4 x 3-1/4 1/4 x 3-3/4 1/4 x 4	MD-SDSH012X05	13.30
3/16 x 7	1/4 x 5 1/4 x 6	MD-SDSH012X07	18.82


MASONRY HAMMER DRILLS - SDS SHANK

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

4 SLOT
SDS SHANK



PARABOLIC
FLUTE

Carbide Tipped Slot Drive System SDS Masonry Hammer Drills are designed for use with all rotary hammers that specify SDS-Plus shank hammer drills. SDS plus shank hammer bits have 4 U-shaped slots cut into the .393 diameter shank, 2 positive rotary drive slots and 2 ball retainer slots to ensure a positive fit between the bit and the bit holder on a SDS-Plus rotary hammer drill which makes possible the most power transmission to the cutting edge for high speed drilling of holes up to 1" in diameter in concrete, masonry and stone. They are also known as SDS Plus Drill Bits.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
5/32	4-1/2	2	MD-SDS010X04	9.20
3/16	4-1/2	2	MD-SDS012X04	8.24
3/16	6-1/2	4	MD-SDS012X06	9.42
3/16	8	6	MD-SDS012X08	10.58
3/16	10	8	MD-SDS012X10	18.82
3/16	14	12	MD-SDS012X14	27.06
7/32	6	4	MD-SDS014X06	9.42
7/32	8	6	MD-SDS014X08	14.78
7/32	14	12	MD-SDS014X14	25.88
1/4	4	2	MD-SDS016X04	8.82
1/4	6	4	MD-SDS016X06	9.42
1/4	9	6	MD-SDS016X09	10.58
1/4	12	9	MD-SDS016X12	16.46
1/4	16	14	MD-SDS016X16	32.34
1/4	20	18	MD-SDS016X20	41.16
5/16	4-1/2	2	MD-SDS020X04	11.32
5/16	6	4	MD-SDS020X06	12.36
5/16	12	10	MD-SDS020X12	22.34
3/8	6	4	MD-SDS024X06	12.02
3/8	9	6	MD-SDS024X09	17.06
3/8	14	11	MD-SDS024X14	23.42
3/8	18	14	MD-SDS024X18	28.46
3/8	20	18	MD-SDS024X20	33.78
3/8	24	22	MD-SDS024X24	44.70
3/8	36	34	MD-SDS024X36	70.56
7/16	6	4	MD-SDS028X06	17.06
7/16	12	10	MD-SDS028X12	24.18
7/16	18	16	MD-SDS028X18	33.52
1/2	6	4	MD-SDS032X06	14.96

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1/2	9	6	MD-SDS032X09	20.94
1/2	14	10	MD-SDS032X14	24.12
1/2	18	14	MD-SDS032X18	30.94
1/2	22	18	MD-SDS032X22	34.70
1/2	38	35	MD-SDS032X38	73.50
9/16	6	4	MD-SDS036X06	21.42
9/16	12	10	MD-SDS036X12	22.34
9/16	18	16	MD-SDS036X18	40.92
5/8	6	4	MD-SDS040X06	22.22
5/8	9	6	MD-SDS040X09	22.94
5/8	14	10	MD-SDS040X14	33.52
5/8	18	14	MD-SDS040X18	48.12
5/8	22	18	MD-SDS040X22	59.98
5/8	36	34	MD-SDS040X36	127.02
11/16	9	6	MD-SDS044X09	40.26
3/4	6	4	MD-SDS048X06	35.78
3/4	9	6	MD-SDS048X09	32.58
3/4	14	10	MD-SDS048X14	44.10
3/4	18	14	MD-SDS048X18	58.76
3/4	22	18	MD-SDS048X22	73.60
27/32	9	6	MD-SDS054X09	52.72
7/8	6	4	MD-SDS056X06	47.04
7/8	9	6	MD-SDS056X09	52.72
7/8	14	10	MD-SDS056X14	60.72
7/8	18	14	MD-SDS056X18	65.82
1	9	6	MD-SDS100X09	58.54
1	14	10	MD-SDS100X14	65.24
1	18	14	MD-SDS100X18	88.72
1	30	28	MD-SDS100X30	144.66

MASONRY DRILL SETS - SDS SHANK

METAL CASE

ILLUSTRATION	TYPE OF DRILL	ITEM NO.	PRICE
	Masonry (SDS Shank) Hammer Drills	MDS-SDS-7	97.74
	Masonry (Ramset Shank) Hammer Drills	MDS-RAM-7	106.56
SIZES OF MASONRY DRILLS IN SETS			
	1 each: 3/16 x 4, 1/4 x 4		
	2 each: 1/4 x 6		
	1 each: 5/16 x 6, 3/8 x 6, 1/2 x 6		




Sizes 3/16 to 1/2 (Wt. 1.40 lbs.)

SDS SHANK QUICK RELEASE ADAPTERS

ADAPTERS FOR HILTI TE-12, 17, 22, SDS, AND RAMSET


ICS WIS

SDS Shank adapters allow you to use 2 slot and 4 slot shank masonry drills with different models of electric hammer drills. Each shank configuration will fit the hammer drill model numbers listed.


ILLUSTRATION	FITS	ITEM NO.	PRICE
	Fits all popular spline drive power tools. See pages 162-163 for complete listing.	SDS-SPLINE	98.78
	Hilti TE 52, 60 Hilti TE 70, 92	SDS-TE60	103.50
	Bosch 11216, SDS-MAX Hilti TE 64, TE-Y Hilti TE 52, 60 Hilti TE 72, 92	SDS-MAX	112.90

Important: Adapters are designed for intermittent use. A power loss of 10-15% and increased bit wear of 15-20% will result when using adapters.

HOW TO USE SDS QUICK RELEASE SHANK ADAPTERS

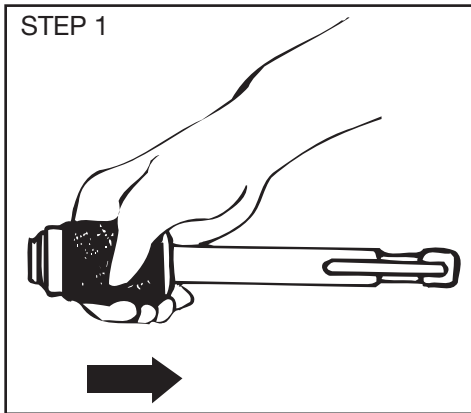

Pull back locking sleeve.

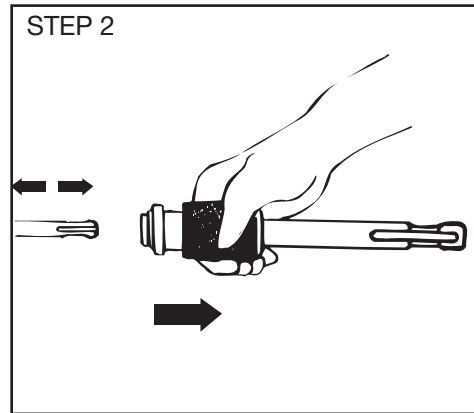

Use this position to insert or remove drill bit.


CARBIDE TIPPED MASONRY HAMMER DRILLS - 2 SLOT SHANK

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

2 SLOT
3/4" DIA. SHANK



PARABOLIC
FLUTE

FOR USE WITH HILTI TE 52, 60, 72, 92 HAMMER DRILL

2 Slot Shank Carbide Tipped Masonry Hammers Drills have a special impact carbide tip with negative tip angle and 130° point. Made to withstand the shock and impact of the hardest hitting rotary hammer drills. Will quickly penetrate the toughest aggregate.

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
3/8	12	6	MD-TE60-024X12	59.24
1/2	12	6	MD-TE60-032X12	61.52
1/2	22	16	MD-TE60-032X22	74.54
1/2	36	28	MD-TE60-032X36	124.66
5/8	12	6	MD-TE60-040X12	62.64
5/8	22	16	MD-TE60-040X22	82.40
5/8	36	28	MD-TE60-040X36	143.00
3/4	12	6	MD-TE60-048X12	56.76
3/4	22	16	MD-TE60-048X22	73.86
3/4	36	28	MD-TE60-048X36	149.94
7/8	12	6	MD-TE60-056X12	68.10
7/8	22	16	MD-TE60-056X22	85.00
7/8	36	28	MD-TE60-056X36	157.52

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
1	12	6	MD-TE60-100X12	77.04
1	22	16	MD-TE60-100X22	109.04
1	36	28	MD-TE60-100X36	188.12
1-1/8	22	16	MD-TE60-108X22	109.04
1-1/8	36	28	MD-TE60-108X36	188.12
1-1/4	16	10	MD-TE60-116X16	108.74
1-1/4	22	16	MD-TE60-116X22	129.88
1-1/4	36	28	MD-TE60-116X36	206.10
1-3/8	22	16	MD-TE60-124X22	162.54
1-3/8	36	28	MD-TE60-124X36	241.24
1-1/2	16	10	MD-TE60-132X16	128.18
1-1/2	22	16	MD-TE60-132X22	164.48
1-1/2	36	28	MD-TE60-132X36	276.42


CARBIDE TIPPED MASONRY HAMMER DRILLS - 4 SLOT SHANK

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

4 SLOT
MAGIC SHANK



PARABOLIC
FLUTE

4 Slot Shank Carbide Tipped Masonry Hammers Drills are for use in Ramset Dinadrill #330 or any SDS style power drill. They fit all two and four slot drive systems. Special impact carbide tip with negative angle and 130° point.

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
3/16	4-1/2	2	MD-RAM012X04	9.38
3/16	6	4	MD-RAM012X06	11.44
1/4	4-1/2	2	MD-RAM016X04	11.44
1/4	6-1/2	4	MD-RAM016X06	12.62
1/4	8	6	MD-RAM016X08	16.24
5/16	6	4	MD-RAM020X06	15.86
5/16	9	6	MD-RAM020X09	16.76
5/16	12	10	MD-RAM020X12	25.54
3/8	6-1/2	4	MD-RAM024X06	14.12
3/8	9	6	MD-RAM024X09	19.30
3/8	12	10	MD-RAM024X12	25.88
7/16	6	4	MD-RAM028X06	20.32
7/16	12	10	MD-RAM028X12	26.60
7/16	18	16	MD-RAM028X18	36.82
1/2	6-1/2	4	MD-RAM032X06	18.24
1/2	9	6	MD-RAM032X09	25.64
1/2	14	10	MD-RAM032X14	31.16
1/2	18	16	MD-RAM032X18	38.74

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
9/16	6	4	MD-RAM036X06	24.96
9/16	12	10	MD-RAM036X12	34.04
9/16	18	16	MD-RAM036X18	44.44
5/8	6	4	MD-RAM040X06	26.88
5/8	9	6	MD-RAM040X09	30.12
5/8	12	8	MD-RAM040X12	40.58
5/8	18	16	MD-RAM040X18	53.80
11/16	6	4	MD-RAM044X06	43.88
3/4	6	4	MD-RAM048X06	39.30
3/4	9	6	MD-RAM048X09	43.28
3/4	12	10	MD-RAM048X12	50.28
3/4	18	16	MD-RAM048X18	61.52
27/32	6	4	MD-RAM054X06	56.46
7/8	6	4	MD-RAM056X06	50.50
7/8	9	6	MD-RAM056X09	55.22
7/8	18	16	MD-RAM056X18	76.70
1	10	6	MD-RAM100X10	63.06
1	18	16	MD-RAM100X18	84.44


CARBIDE TIPPED MASONRY HAMMER DRILLS - SDS-MAX

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

5 SLOT
SDS-MAX SHANK



PARABOLIC
FLUTE

SINGLE CUTTER DESIGN

Carbide Tipped SDS-MAX Heavy Duty Slot Drive Masonry Hammer Drills with single cutting edge are designed for use with large SDS-MAX drive rotary hammers. SDS-MAX drive hammer bits have 5 U-shaped slots cut into the .708 diameter shank, 3 positive rotary drive slots, and 2 ball retainer slots to hold bit in rotary hammer. They are used for drilling large diameter holes in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
3/8	13-1/2	7	MD-MAX024X13	59.24
1/2	13-1/2	7	MD-MAX032X13	61.52
1/2	21	16	MD-MAX032X21	74.54
1/2	30	25	MD-MAX032X30	-
1/2	36	31	MD-MAX032X36	124.66
9/16	13	7	MD-MAX036X13	61.40
9/16	21	16	MD-MAX036X21	85.26
5/8	13	7	MD-MAX040X13	62.64
5/8	21	16	MD-MAX040X21	82.40
5/8	30	25	MD-MAX040X30	82.40
5/8	36	31	MD-MAX040X36	142.62
3/4	13	7	MD-MAX048X13	56.76
3/4	21	16	MD-MAX048X21	73.86
3/4	30	25	MD-MAX048X30	-
3/4	36	31	MD-MAX048X36	149.94
7/8	13	8	MD-MAX056X13	68.10
7/8	21	16	MD-MAX056X21	85.00
1	13	8	MD-MAX100X13	77.04
1	21	16	MD-MAX100X21	100.32
1	36	31	MD-MAX100X36	188.16
1-1/8	13	8	MD-MAX108X13	85.74
1-1/8	21	16	MD-MAX108X21	109.04
1-1/4	15	10	MD-MAX116X15	108.74
1-1/4	21	16	MD-MAX116X21	129.88
1-3/8	21	16	MD-MAX124X21	162.64
1-1/2	21	16	MD-MAX132X21	164.48

5 SLOT SHANK (SDS-MAX®) BITS FIT THE FOLLOWING HAMMERS
(Complete Global Reference on Pages 28-29)

BOSCH®	HILTI®	HILTI®
11216	TE-54	TE 52, 60
SDS-MAX	TE-Y (New)	TE 72, 92

Quick Reference for 5 Slot Shank (SDS-MAX) Tools

SDS ADAPTERS	A & B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
PAGE NO. OF ITEMS AVAILABLE			
15	22	7-8	26-27


CARBIDE TIPPED
MASONRY HAMMER DRILLS - SDS-MAX

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

5 SLOT
SDS-MAX SHANK



PARABOLIC
FLUTE

MULTI CUTTER DESIGN

Carbide Tipped SDS-MAX Heavy Duty Slot Drive Masonry Hammer Drills with 4 cross cutting edges are designed for use with large SDS-MAX drive rotary hammers. The 4 cross cutting edges pulverize the material to be drilled better and quicker than single edge hammer bits. SDS-MAX drive hammer bits have 5 U-shaped slots cut into the .708" diameter shank, 3 positive rotary drive slots, and 2 ball retainer slots to hold bit in rotary hammer. It is the toughest drill of its kind and is often used instead of a carbide tipped core drill for drilling large diameter holes in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1/2	30	24	MD-MAXX032X30	108.34
1/2	36	30	MD-MAXX032X36	124.10
9/16	13	7	MD-MAXX036X13	61.40
9/16	21	15	MD-MAXX036X21	85.26
5/8	13	7	MD-MAXX040X13	82.40
5/8	21	15	MD-MAXX040X21	82.40
5/8	30	24	MD-MAXX040X30	113.88
3/4	13	7	MD-MAXX048X13	56.76
3/4	21	15	MD-MAXX048X21	73.86
3/4	30	24	MD-MAXX048X30	117.50
7/8	13	7	MD-MAXX056X13	68.10
7/8	21	15	MD-MAXX056X21	85.00
1	13	7	MD-MAXX100X13	77.04
1	21	15	MD-MAXX100X21	85.00
1	36	30	MD-MAXX100X36	188.16
1-1/8	13	7	MD-MAXX108X13	85.74
1-1/8	21	15	MD-MAXX108X21	109.04
1-1/4	15	9	MD-MAXX116X15	109.04
1-1/4	21	15	MD-MAXX116X21	129.88
1-3/8	21	15	MD-MAXX124X21	162.64
1-1/2	15	9	MD-MAXX132X15	128.18
1-1/2	21	15	MD-MAXX132X21	164.50

5 SLOT SHANK (SDS-MAXX®) BITS FIT THE FOLLOWING HAMMERS
(Complete Global Reference on Pages 28-29)

BOSCH®	HILTI®	HILTI®
11216	TE-54	TE 52, 60
SDS-MAX	TE-Y (New)	TE 72, 92

Quick Reference for 5 Slot Shank (SDS-MAX) Tools

SDS ADAPTERS	A & B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
PAGE NO. OF ITEMS AVAILABLE			
15	22	7-8	26-27

CARBIDE TIPPED MASONRY HAMMER DRILLS - SPLINE SHANK

SINGLE CUTTER DESIGN

ICS USA/EUR

HEAVY DUTY

HAMMER DRILL POINT

SPLINE
SHANK



PARABOLIC
FLUTE

Carbide Tipped Spline Shank Drive Masonry Hammer Drills with a single cutting edge are designed for use with spline-drive rotary hammers. Spline drive hammer bits have 12 splines cut into the 3/4" diameter shank to ensure a positive fit between the bit and the bit holder on a spline drive rotary hammer which makes possible the most power transmission to the cutting edge for high speed drilling of large diameter holes in concrete, masonry and stone.

NOMINAL		DRILLING	ITEM	PRICE
SIZE	LENGTH	DEPTH	NO.	
3/8	12	6	MD-S024X12	47.72
3/8	18	12	MD-S024X18	59.98
1/2	12	6	MD-S032X12	47.72
1/2	16	10	MD-S032X16	52.92
1/2	22	16	MD-S032X22	71.12
1/2	36	28	MD-S032X36	112.90
9/16	12	6	MD-S036X12	50.58
5/8	12	6	MD-S040X12	50.58
5/8	16	10	MD-S040X16	52.92
5/8	22	16	MD-S040X22	71.82
5/8	36	28	MD-S040X36	143.00
11/16	12	6	MD-S044X12	68.22
3/4	12	6	MD-S048X12	54.10
3/4	16	10	MD-S048X16	56.46
3/4	22	16	MD-S048X22	74.00
3/4	36	28	MD-S048X36	149.46
7/8	12	6	MD-S056X12	62.68
7/8	16	10	MD-S056X16	69.28
7/8	22	16	MD-S056X22	79.72

NOMINAL		DRILLING	ITEM	PRICE
SIZE	LENGTH	DEPTH	NO.	
7/8	36	22	MD-S056X36	151.70
1	12	6	MD-S100X12	65.86
1	16	10	MD-S100X16	75.26
1	22	16	MD-S100X22	88.80
1	36	28	MD-S100X36	188.16
1-1/8	16	10	MD-S108X16	85.86
1-1/8	22	16	MD-S108X22	99.96
1-1/8	36	28	MD-S108X36	209.18
1-1/4	16	10	MD-S116X16	89.38
1-1/4	22	16	MD-S116X22	110.54
1-1/4	36	28	MD-S116X36	229.18
1-3/8	16	10	MD-S124X16	99.96
1-3/8	22	16	MD-S124X22	128.18
1-3/8	36	28	MD-S124X36	268.26
1-1/2	16	10	MD-S132X16	117.60
1-1/2	22	16	MD-S132X22	147.00
1-1/2	36	28	MD-S132X36	307.38
2	16	10	MD-S200X16	205.80
2	22	16	MD-S200X22	232.86

SPLINE DRIVE BITS (MD-S) FIT THE FOLLOWING HAMMERS
(Complete Global Reference on Pages 162-163)

AEG ®	B&D ®	BOSCH ®	HITACHI ®	METABO ®	MILWAUKEE ®
PH-350	5041	11202	DH 38 YA	RH 66	47
PH-350 D	5042	11203	DS 50 SB	RH 99	48
PH-350 HD	5043	11204	DS 50 SB	RH 99X	5343
PH-2400	5044	11205	DH 384 A	1129	5344
PH-38	2022	11206		1128	5347
PHD-38	2032	11208		1130	5348
PHD-26	2038	11209		1131	
PH-240 D		11214			

KANGO ®	MAKITA ®	ITT PHILIPS ®	PORTER CABLE ®	RAMSET ®	RYOBI ®
637 S	HR 3851	747-2	639	442	ED 382 P
950 S		RED HEAD®		445	
		747-2			

Quick Reference for Spline Shank (MD-S) Tools

SDS ADAPTERS	A & B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
PAGE NO. OF ITEMS AVAILABLE			
15	22	7-8	26-27

CARBIDE TIPPED
MASONRY HAMMER DRILLS - SPLINE SHANK
MULTI CUTTER DESIGN

ICS USA

HEAVY DUTY

CROSS HEAD POINT

SPLINE SHANK



PARABOLIC FLUTE

Carbide Tipped Spline Shank Drive Masonry Hammer Drills with 4 cross cutting edges are designed for use with spline drive rotary hammers. The 4 cross cutting edges pulverize the material to be drilled better and quicker than single edge hammer bits. Spline drive hammer bits have 12 splines cut into the 3/4" diameter shank to ensure a positive fit between the bit and the bit holder on a spline drive rotary hammer which makes possible the most power transmission to the cutting edge for high speed drilling of large diameter holes in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.
SIZE	LENGTH		
3/4	12	6	MD-SX048X12
3/4	18	12	MD-SX048X18
3/4	23	17	MD-SX048X23
7/8	12	6	MD-SX056X12
7/8	18	12	MD-SX056X18
7/8	23	17	MD-SX056X23
1	12	6	MD-SX100X12
1	18	12	MD-SX100X18
1	23	17	MD-SX100X23
1-1/8	18	12	MD-SX108X18

NOMINAL		DRILLING DEPTH	ITEM NO.
SIZE	LENGTH		
1-1/8	23	17	MD-SX108X23
1-1/4	18	12	MD-SX116X18
1-1/4	23	17	MD-SX116X23
1-3/8	23	17	MD-SX124X23
1-1/2	18	12	MD-SX132X18
1-1/2	23	17	MD-SX132X23
1-5/8	23	17	MD-SX140X23
1-3/4	23	17	MD-SX148X23
2	23	17	MD-SX200X23

SPLINE DRIVE BITS (MD-SX) FIT THE FOLLOWING HAMMERS
 (Complete Global Reference on Pages 29-30)

AEG ®	B&D ®	BOSCH ®	HITACHI ®	METABO ®	MILWAUKEE ®
PH-350	5041	11202	DH 38 YA	RH 66	47
PH-350 D	5042	11203	DS 50 SB	RH 99	48
PH-350 HD	5043	11204	DS 50 SB	RH 99X	5343
PH-2400	5044	11205	DH 384 A	1129	5344
PH-38	2022	11206		1128	5347
PHD-38	2032	11208		1130	5348
PHD-26	2038	11209		1131	
PH-240 D		11214			

KANGO ®	MAKITA ®	ITT PHILIPS ®	PORTER CABLE ®	RAMSET ®	RYOBI ®
637 S 950 S	HR 3851	747-2	639	442 445	ED 382 P
		RED HEAD® 747-2			

Quick Reference for Spline Shank (MD-SX) Tools

SDS ADAPTERS	A & B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
PAGE NO. OF ITEMS AVAILABLE			
15	22	7-8	26-27


MASONRY HAMMER BITS - "A" TAPER SHANK

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

"A" TAPER SHANK



PARABOLIC FLUTE

Carbide Tipped "A" Taper Shank Masonry Hammer Bits are designed to fit into "A" taper chuck adapters which allow "A" taper shank masonry hammer bits to be used with almost any current or discontinued model hammer drill. They are manufactured with a taper of 1:20 and are intended for drilling holes from 3/16" to 7/8" in concrete, masonry and stone. They are also known as Taper Shank Rotary Hammer Drill Bits.

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
3/16	6	3-1/2	MD-A012X06	9.60
1/4	6	3-1/2	MD-A016X06	9.14
1/4	12	10	MD-A016X12	21.06
5/16	6	3-1/2	MD-A020X06	10.90
3/8	6	3-1/2	MD-A024X06	11.72
3/8	9	6	MD-A024X09	14.36
3/8	12	9	MD-A024X12	20.72
3/8	20	18	MD-A024X20	31.84
7/16	6	3-1/2	MD-A028X06	16.46
1/2	6	3-1/2	MD-A032X06	14.60
1/2	9	6	MD-A032X09	19.90
1/2	12	9	MD-A032X12	25.24
1/2	20	17	MD-A032X20	33.48

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
9/16	5 - 6	3-1/2	MD-A036X06	17.38
9/16	9	6	MD-A036X09	20.24
5/8	5 - 6	3	MD-A040X06	19.20
5/8	9	6	MD-A040X09	24.70
5/8	12	9	MD-A040X12	33.70
5/8	18	16	MD-A040X18	43.16
11/16	5 - 6	3	MD-A044X06	23.42
11/16	9	5	MD-A044X09	26.32
3/4	5-1/2 - 6	3	MD-A048X06	24.46
3/4	9	6	MD-A048X09	33.06
3/4	12	9	MD-A048X12	38.82
3/4	18	16	MD-A048X18	49.00
7/8	6	4	MD-A056X06	37.64


MASONRY HAMMER BITS - "B" TAPER SHANK

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

"B" TAPER SHANK



PARABOLIC FLUTE

Carbide Tipped "B" Taper Shank Masonry Hammer Bits are designed to fit into "B" taper chuck adapter which allow "B" taper shank masonry hammer bits to be used with almost any current or discontinued model hammer drill. They are manufactured with a taper of 1:10 and are intended for drilling holes from 1/2" to 1-1/4" in concrete, masonry and stone. They are also known as Taper Shank Rotary Hammer Drill Bits.

NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
1/2	9	6	MD-B032X09	20.44
1/2	12	9	MD-B032X12	25.02
1/2	14	11	MD-B032X14	27.06
1/2	20	16	MD-B032X20	33.38
9/16	9	6	MD-B036X09	23.02
9/16	18	14	MD-B036X18	33.52
5/8	9	6	MD-B040X09	24.96
5/8	14	10	MD-B040X14	28.06
5/8	18-20	16	MD-B040X20	40.82
5/8	30	28	MD-B040X30	94.08
11/16	9	6	MD-B044X09	30.00
11/16	18	16	MD-B044X18	40.74














NOMINAL		DRILLING	ITEM	
SIZE	LENGTH	DEPTH	NO.	PRICE
3/4	9	6	MD-B048X09	37.76
3/4	12-14	10	MD-B048X14	38.78
3/4	18-20	16	MD-B048X20	55.28
27/32	9	7	MD-B054X09	38.22
7/8	9	6	MD-B056X09	45.46
7/8	18	16	MD-B056X18	65.16
1	9	6	MD-B100X09	51.84
1	18	16	MD-B100X18	70.64
1-1/8	9	6	MD-B108X09	52.92
1-1/8	18	16	MD-B108X18	83.00
1-1/4	9	6	MD-B116X09	74.68
1-1/4	18	16	MD-B116X18	92.32

TAPER CHUCK ADAPTERS

ADAPTERS FOR "A" AND "B" TAPER MASONRY DRILLS

ICS USA

Taper chuck adapters allow you to use "A" or "B" taper shank masonry bits with almost any make of electric hammer drill. Each shank configuration will fit the hammer drill model numbers listed. A drift pin is included with each adapter.

ILLUSTRATION	FITS HAMMER MODEL	ITEM NO.		PRICE
		A TAPER	B TAPER	
	Skil 706, 707, 708 Skil 1706 B & D 5040, 5049 Rockwell 600, 601 Ramset 620	AT-706	-	45.86
	Skil 717	AT-717S	-	45.86
	B & D 717, 718, 719 B & D 5045, 5050 B & D 5046	AT-717BD	BT-717BD	45.86
	Skil 726 Milw 5300, 5310 Milw 5305, 5315	AT-726	BT-726	45.86
	Skil 728, 731, 732, 628 Rockwell 602, 605, 606 Rockwell 1602 B & D 5048 Milw 5325, 5326 Miller Falls SP499K	AT-728	BT-728	45.86
	Skil 736	-	BT-736	57.62
	Phillips 747, 700 Bosch 11201 Metabo RH 90, 65	AT-747	BT-747	49.40
	Ramset 330	AT-RAM	BT-RAM	38.82
	Fits all popular 4 slot power tools. See pages 162 - 163 for complete listing.	AT-SDS	BT-SDS	33.52
	Fits all popular spline drive power tools. See pages 162 - 163 for complete listing.	AT-Spline	BT-Spline	33.52
	Hilti TE 52, 60, 70, 92	AT-TE60	BT-TE60	42.34
	Wacker	AT-Wacker	BT-Wacker	57.62
	Bosch 11216, SDS-MAX Hilti TE 64, TE-Y Hilti TE 52, 60 Hilti TE 72, 92	AT-MAX	-	42.34


MASONRY (9/16" HEX SHANK) HAMMER DRILLS

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

SKIL 728
HEX SHANK



WIDE
SPIRAL

Carbide Tipped Heavy Duty 9/16" Hex Shank Masonry Hammer Drills, commonly classified as the Skil 728 Hex Shank, are designed to fit the following 9/16" hex drive rotary hammers:

Skil 628,728, 731, 731, 732, 1760
Milwaukee 5325, 5326

Black and Decker 5048
Miller Falls SP 499K

Rockwell 602, 1602, 606, 616

(Complete Global Reference on Pages 162-163)

9/16" Hex shank rotary hammer drills have 6 flats on the shank to ensure a positive drive action and a flat bottom on the end of the shank for tough hammering of aggregate. They are used for drilling holes from 3/8" to 1-1/2" in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
7/16	10	4-1/2	MD-728-028X10	46.58
9/16	13	7	MD-728-036X13	56.38
5/8	10	4-1/2	MD-728-040X10	58.78
5/8	16	10-1/2	MD-728-040X16	73.42
11/16	13	7	MD-728-044X13	66.24
7/8	10	4-1/2	MD-728-056X10	69.04
7/8	17	11-1/2	MD-728-056X17	86.94
7/8	22	16-1/2	MD-728-056X22	97.90

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1-1/8	17	11-1/2	MD-728-108X17	103.58
1-1/8	22	17	MD-728-108X22	120.48
1-1/4	17	11-1/2	MD-728-116X17	126.34
1-3/8	17	11-1/2	MD-728-124X17	143.24
1-3/8	22	17	MD-728-124X22	167.62
1-1/2	17	11-1/2	MD-728-132X17	158.70
1-1/2	22	17	MD-728-132X22	187.40

MASONRY (3/4" HEX SHANK) HAMMER DRILLS

ICS

USA

HEAVY DUTY

HAMMER DRILL POINT

SKIL 736
HEX SHANK



WIDE
SPIRAL

Carbide Tipped Heavy Duty 3/4" Hex Shank Masonry Hammer Drills, commonly classified as the Skil 736 Hex Shank, are designed to fit the following 3/4" hex drive rotary hammers.

Skil 736, 1770

Stanley HD20, 45

3/4" Hex shank rotary hammer drills have 6 flats on the shank to ensure a positive drive action and a flat bottom on the end of the shank for tough hammering of aggregate. They are used for drilling holes from 3/4" to 2" in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
3/4	24	18	MD-736-048X24	138.44
3/4	36	30	MD-736-048X36	388.08
7/8	24	18	MD-736-056X24	153.14
1	18	12	MD-736-100X18	124.20
1	24	18	MD-736-100X24	164.30
1-1/8	24	18	MD-736-108X24	181.62

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1-1/8	36	30	MD-736-108X36	365.76
1-1/8	48	42	MD-736-108X48	679.00
1-1/4	24	18	MD-736-116X24	224.56
1-1/4	36	30	MD-736-116X36	402.20
1-1/2	24	18	MD-736-132X24	349.82
2	24	18	MD-736-200X24	679.00

CARBIDE TIPPED

MASONRY (21.0MM HEX SHANK) HAMMER DRILLS

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

**KANGO 950
HEX SHANK**



**PARABOLIC
FLUTE**

Carbide Tipped Heavy Duty 21.0mm Hex Shank Masonry Drills, commonly classified as the Kango 950 Hex Shank, are designed to fit the following 21.0mm hex drive rotary hammers:

- | | |
|----------------------------------|-----------------------|
| Kango 950, 900, 1400, 450x, 950x | Hitachi DH505A, H555A |
| Makita HR5000R/K, HM1200K | Ryobi CH 485PK |

21.0mm hex shank rotary hammer drills have 6 flats on the shank to ensure a positive drive action and a flat bottom on the end of the shank for tough hammering of aggregate. They are used for drilling holes from 5/8" to 1-3/4" in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
5/8	14	7	MD-950-040X14	63.36
5/8	19	12	MD-950-040X19	74.84
5/8	25	18	MD-950-040X25	108.98
3/4	25	18	MD-950-048X25	127.12
7/8	14	7	MD-950-056X14	98.28
7/8	25	18	MD-950-056X25	137.64
1	14	7	MD-950-100X14	98.28
1	25	18	MD-950-100X25	138.18

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1-1/8	14	7	MD-950-108X14	113.62
1-1/8	25	18	MD-950-108X25	156.42
1-1/4	14	7	MD-950-116X14	138.84
1-1/4	25	18	MD-950-116X25	204.98
1-1/2	14	7	MD-950-132X14	166.50
1-1/2	25	18	MD-950-132X25	238.28
1-3/4	25	18	MD-950-148X25	404.22

CARBIDE TIPPED

MASONRY (19.0MM HEX SHANK) HAMMER DRILLS

ICS USA

HEAVY DUTY

HAMMER DRILL POINT

**KANGO 637
HEX SHANK**



**PARABOLIC
FLUTE**

Carbide Tipped Heavy Duty 19.0mm Hex Shank Masonry Drills, commonly classified as the Kango 637 Hex Shank, are designed to fit the following 19.0mm hex drive rotary hammers:

- | | |
|---|---------------------------------------|
| Kango 500,501, 625, 627, 637, 750, 750x | Rockwell 605, 607, 637, 750, 750x, 60 |
|---|---------------------------------------|

19.0mm hex shank rotary hammer drills have 6 flats on the shank to ensure a positive drive action and a flat bottom on the end of the shank for tough hammering of aggregate. They are used for drilling holes from 5/8" to 1-3/4" in concrete, masonry and stone.

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
1/2	23	13	MD-637-032X23	78.40
5/8	13	7	MD-637-040X13	59.78
5/8	19	13	MD-637-040X19	71.70
5/8	23	17	MD-637-040X23	78.90
3/4	23	17	MD-637-048X23	88.50

NOMINAL		DRILLING DEPTH	ITEM NO.	PRICE
SIZE	LENGTH			
7/8	13	7	MD-637-056X13	84.36
7/8	23	17	MD-637-056X23	104.76
1	23	17	MD-637-100X23	121.42
1-1/4	19	13	MD-637-116X19	166.00






ELECTRIC HAMMER CHISELS




ICS USA

HEAVY DUTY

FORGED STEEL

ICS Electric Hammer Chisels are available in a variety of shank styles. The descriptions below will assist the hammer drill user in making a selection for their specific application.

ILLUSTRATION	SHANK STYLE	FITS/APPLICATION
	SPLINE (5/8" ROUND HEX)	Fits all makes of Spline Drive Hammers. Round hex shank works effectively in Spline Drive machines made with and without rotation / hammer only switches.
	SDS-PLUS	Fits all popular 4 slot power tools. Operator simply moves selector switch to percussion only mode to use.
	BOSCH SDS-MAX	Fits directly into new Bosch SDS-MAX Hammers and Hilti Hammers with large 2 slot bit locking systems.
	HEX-DEMOLITION (3/4" HEX)	Fits Bosch Models 11302 and 11305
	HEX-BREAKER (1-1/8" HEX)	Fits Bosch Model 11304 Hex Shank Chisels come with internal locks for Demolition Hammers and External Collars for Pneumatic Hammers.

DESCRIPTION	SIZE	NOMINAL LENGTH	SHANK STYLE	ITEM NO.	PRICE
<p>BULL (MOIL) POINT</p>  <p>Electric Hammer Bull Point Chisels are designed for light demolition work and starting holes in concrete slabs, brick, mortar, slate etc. They are also known as Electric Hammer Moil Point Chisels.</p>	(PT.)	12	SPLINE	EHC-BP-12S	25.28
	(PT.)	18	SPLINE	EHC-BP-18S	32.62
	(PT.)	10	SDS-PLUS	EHC-BP-10SDS	32.72
	(PT.)	12	SDS-MAX	EHC-BP-12MAX	26.64
	(PT.)	16	SDS-MAX	EHC-BP-16MAX	32.82
	(PT.)	12	HEX (3/4)	EHC-BP-12HD	25.28
	(PT.)	18	HEX (3/4)	EHC-BP-18HD	32.62
	(PT.)	12	HEX (1-1/8)	EHC-BP-12HB	47.54
<p>FLAT (COLD) CHISEL</p>  <p>Electric Hammer Flat Chisels are designed for edging, chipping, scaling or channeling concrete, masonry or brick. They are also known as Electric Hammer Cold Chisels.</p>	1	12	SPLINE	EHC-FC-12S	25.28
	1	18	SPLINE	EHC-FC-18S	32.62
	1	10	SDS-PLUS	EHC-FC-10SDS	32.72
	1	12	SDS-MAX	EHC-FC-12MAX	26.64
	1	16	SDS-MAX	EHC-FC-16MAX	32.82
	1	12	HEX (3/4)	EHC-FC-12HD	23.68
	1	18	HEX (3/4)	EHC-FC-18HD	32.40
	1	12	HEX (1-1/8)	EHC-FC-12HB	47.54
<p>SCALING CHISEL</p>  <p>Electric Hammer Scaling Chisels are designed for removing scale, rust, concrete and weld spatter. They are also known as Electric Hammer Wide Chisels.</p>	1-1/2	12	SPLINE	EHC-SC-12S-A	34.42
	1-1/2	18	SPLINE	EHC-SC-18S-A	41.02
	2	12	SPLINE	EHC-SC-12S-B	44.00
	2	18	SPLINE	EHC-SC-18S-B	45.98
	1-1/2	10	SDS-PLUS	EHC-SC-10SDS-A	34.34
	2	12	SDS-MAX	EHC-SC-12MAX	38.18
	2	16	SDS-MAX	EHC-SC-16MAX	66.50
	1-1/2	12	HEX (3/4)	EHC-SC-12HD-A	37.86
	1-1/2	18	HEX (3/4)	EHC-SC-18HD-A	37.86
	2	12	HEX (3/4)	EHC-SC-12HD-B	31.48
	2	18	HEX (3/4)	EHC-SC-18HD-B	41.02










ELECTRIC HAMMER CHISELS

MAS-27


ICS USA

HEAVY DUTY

FORGED STEEL

DESCRIPTION	SIZE	NOMINAL LENGTH	SHANK STYLE	ITEM NO.	PRICE
SLOTING TOOL  Electric Hammer Slotting Chisels are designed for slotting and cutting web between drilled holes in concrete to make larger openings. Alternately known as an Electric Hammer Slotting Tool.	1/8	12	SPLINE	EHC-ST-12S	34.42
	1-1/4	12	SDS-MAX	EHC-ST-12MAX	42.40
	1-1/8	12	HEX (3/4)	EHC-ST-12HD	34.42
MORTAR (SEAM) CHISEL  Electric Hammer Mortar Chisels are for removing old mortar between bricks before tuck pointing or caulking. They can also be used to cut narrow channels or to remove bricks in wall for installing insulation. They are also known as Electric Hammer Seam Chisels or Brick Removing Chisels.	1-1/8	15	SPLINE	EHC-MC-15S	30.10
	1-1/8	12	SDS-MAX	EHC-MC-12MAX	44.48
	1-1/8	15	HEX (3/4)	EHC-MC-15HD	27.60
CLAY SPADE 5-1/2"  Electric Hammer Clay Spade Chisels are designed for digging out clay, hard packed gravel, dirt, shale etc... They are primarily used for landscaping and are not for use in concrete.	4-1/2	18	SPLINE	EHC-CS-18S	132.74
	4-1/2	16	SDS-MAX	EHC-CS-16MAX	128.74
	4-1/2	18	HEX (3/4)	EHC-CS-18HD	104.32
	5-1/2	16	HEX (1-1/8)	EHC-CS-16HB	195.32
ASPHALT CUTTER 5"  Electric Hammer Asphalt Cutter Chisels are designed for cutting or breaking up asphalt or hard ground. They are primarily used for road maintenance and are not for use in concrete. They are also known as Tarmac Chisels.	5	16	HEX (1-1/8)	EHC-AC-16HB	148.24
	5	16	HEX (3/4)	EHC-AC-16HD	127.46
	5	16	SDS-MAX	EHC-AC-16MAX	157.08
GROUND ROD DRIVER  Electric Hammer Ground Rod Drivers are designed for driving 5/8" or 3/4" electrical grounding rods into earth near the edge of structure foundation or for installing parking bumpers.	5/8 - 3/4	11	SPLINE	EHC-GRD-11S	128.12
	5/8 - 3/4	11	SDS-MAX	EHC-GRD-11MAX	128.12
	5/8 - 3/4	11	HEX (3/4)	EHC-GRD-11HD	123.16
BUSHING TOOL (1 PC TOOL)  The 1 Piece Electric Hammer Bushing Tool is a solid forged hammer chisel designed for roughing up concrete and asphalt prior to resurfacing. May be used to produce a rough exterior finish.	1-1/2 x 1-1/2	8	SPLINE	EHC-BT-S	112.62
	1-1/2 x 1-1/2	10	MAX	EHC-BT-MAX	122.06
	1-1/2 x 1-1/2	8	HEX (3/4)	EHC-BT-HD	112.62
	1-1/4 x 1-1/4	11-1/2	SDS-PLUS	EHC-BT-SDS	122.06
BUSHING TOOL (2 PC TOOL KIT)  The 2 Piece Electric Hammer Bushing Tool has a replaceable tool head and tool shank. It is designed for roughing up concrete and asphalt prior to resurfacing. It may also be used to produce a rough exterior finish.	1-1/2 x 1-1/2	8	SPLINE	EHC-BTK-S	61.74
	1-1/2 x 1-1/2	10	SDS-MAX	EHC-BTK-MAX	100.34
	1-1/2 x 1-1/2	8	HEX (3/4)	EHC-BTK-HD	79.86
BUSHING TOOL HEADS  Electric Hammer Bushing Tool Heads are designed to fit any style bushing tool shank or stem, They are also known as Bushing Hammer Tools.	1-1/2 x 1-1/2	-	FITS ALL SHANKS	EHC-BTH	119.02
BUSHING TOOL SHANK (STEMS)  Electric Hammer Bushing Tools Shanks are designed to fit all Spline, SDS-MAX, or 3/4" Hex Drive Hammer Drills. They are also known as Electric Hammer Bushing Tool Stems or Bushing Drivers.		8	SPLINE	EHC-BTS-8S	22.66
		10	SDS-MAX	EHC-BTS-10MAX	53.74
		8	HEX (3/4)	EHC-BTS-8HD	22.34

NOTE: Other styles and sizes available on request.



All ICS Electric Hammer Chisels are heat treated for Heavy Duty use and can be easily maintained using simple hand grinding.

ROTARY HAMMER DRILL INDEX

GLOBAL REFERENCE

ROTARY HAMMER DRILL MODEL	SHANK STYLE	DRILL BITS	SDS ADAPTERS	A&B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
		PAGE NO. OF ITEMS AVAILABLE				
AEG: PH350,350D,240D,38,350HD,2400,PHD26,38 AEG: PH210,PHE 16RL,19RL,26,200,20,2000 AEG: BH 25,20	SPLINE SDS HEX	19-20 13-14 -	15 - -	22 22 -	7-8 7 -	27-28 27-28 -
BAIER: BBH 320/322 BAIER: BBH 300 BAIER: BBH 290 BAIER: COMBI 90	SDS HEX-M14 HEX-M14 HEX	13-14 - - -	- - - -	22 - - -	7 - - -	27-28 - - -
BLACK & DECKER: 5041,42,43,44,59,MACH 0 HD 2022,32,38,P8022,32,38 BLACK & DECKER: 5041,5016-9,5054,HD2016,2022 BLACK & DECKER: 5093,5099K BLACK & DECKER: 5055 BLACK & DECKER: 5048 BLACK & DECKER: 717,718,719,5045,46,50 BLACK & DECKER: 5040-09	SPLINE SDS SDS-MAX SPLINE HEX-9/16 HEX-7/16 HEX-3/8	19-20 13-14 18-19 19-20 23 24 24	15 - 15 15 15 - -	22 22 22 22 22 22 22	7-8 7 7-8 7-8 - - -	27-28 27-28 27-28 27-28 - - -
BOSCH: 11202,03,04,05,06,08,09,14,UBH 4/26 20S UBH 6.35,UBH 6.35D,UBH 10.50, 12.50 GBH 7.45DE,GBH 7.75DE,USH 6 BOSCH: 11207 VS,11210 VSR,11211 VS 11212 VSR,11213 RK,1215,11221,11222 11224,11228,1215 DVSR, UBH 2/20 SE 3/16 S,3/16 SE,3/20 SE,3/24 SE 4/26-2DS,4/26 SE,2/14 SE,PBH 14E BOSCH: 11214,16,23,27,30,31 BOSCH: 11201 BOSCH: USH 10,HSH 10 BOSCH: USH 27,USH 28	SPLINE SDS SDS-MAX HEX-9/16 HEX-M19 HEX-M29	19-20 13-14 18-19 158 159 -	15 - 15 - - -	22 22 22 22 - -	7-8 7 7 - - -	27-28 27-28 27-28 - - -
BOSSONG:	HEX-9/16	-	-	22	7	27-28
CHICAGO PNEUMATIC: CP-9K	HEX	-	-	-	-	-
DEWALT: 514,23,57K	SDS	13-14	-	22	7	27-28
DUSS: PO32,P36,P80,PK100,P60,P90 DUSS: P28,PN28,P28S,PN28S DUSS: PK40,PK45	HEX-3/4 HEX-M13 HEX-M16	- - -	- - -	22 - -	- - -	- - -
ELU: EHD 323	SDS	13-14	-	22	7	27-28
FEIN: 637/2,642	SDS	13-14	-	22	7	27-28
FISCHER:	SPLINE	19-20	15	22	7-8	27-28
FORET A GLACE:	SDS	13-14	-	22	7	27-28
HILTI: TE10,10A,12,12S,17,22,24,GP22 HILTI: TE 52,60,72,92 HILTI: TE 42,52,54,60,72,74,92,94 HILTI: TORNA 765	SDS SDS 2-SLOT(RD) SDS-MAX HEX	13-14 150 18-19 -	- 15 15 -	22 22 22 -	7 7-8 7-8 -	27-28 27-28 27-28 -
HITACHI: DH38YA,DH50SB,DH384A HITACHI: VA16,DH22/DH28Y,DH50,VRT22A,VRV16 HITACHI: DH40MB HITACHI: DH50SA,H55SA HITACHI: PR25A, PRP38,PR50,DH28Y,DH38Y DH38YB,VRV38 HITACHI: PH65A HITACHI: PRT60	SPLINE SDS SDS-MAX HEX-9/16 HEX-1/2 HEX-M30 SPLINE	19-20 13-14 18-19 - - - 19-20	15 - 15 - - - 15	22 22 22 22 - 22 22	7-8 7 7 - - - 7-8	27-28 27-28 27-28 - - - 27-28
IMPEX-ITW: SD 3500	SPLINE	19-20	15	22	7-8	27-28
INGERSOL-RAND: 8067,HS625U,HS650U INGERSOL-RAND: 8087	HEX-9/16 HEX	23 -	15 -	22 -	- -	- -
KANGO: 4305,5015,6375,9505 KANGO: 285,327,422,426,430D KANGO: 950,950X,450X,70 KANGO: 500,501,625,627,637,638,750,750X	SPLINE SDS HEX-M21 HEX-1/2	19-20 13-14 159 159	15 - - -	22 22 - -	7-8 7 - -	27-28 27-28 - -
KRESS: HM10,HM10E,HM10/2	SDS	13-14	-	22	7	27-28
MAKITA: HR3851,HR5000,HR3520B,HR3850B MAKITA: HR1821,2210,2511,1810 MAKITA: HR400C MAKITA: 8022B,8700N,8038N,8035NB,HR3801 HR3850,HR3520 MAKITA: HR5000 R/K, HM1200K MAKITA: 8900S,HM1200 MAKITA: 8900N,HM1300,HM1400 MAKITA: 8050	SPLINE SDS SDS-MAX HEX-1/2 HEX-M21 HEX-M20.5 HEX-M30 SPLINE	19-20 13-14 18-19 - 26 - - 19-20	15 - 15 - - - - 15	22 22 22 - - - - 22	7-8 7 7 - - - - 7-8	27-28 27-28 27-28 - - - - 27-28
MARTO: RW 12 MARTO: RW 50	SDS HEX	13-14 -	- -	22 -	7 -	27-28 -
MATSUSHITA: EZ6811, 6802	SDS	13-14	-	22	-	27-28

ROTARY HAMMER DRILL INDEX

MAS-29

GLOBAL REFERENCE

ROTARY HAMMER DRILL MODEL	SHANK STYLE	DRILL BITS	SDS ADAPTERS	A&B TAPER ADAPTERS	HAMMER CORE BITS	HAMMER CHISELS
		PAGE NO. OF ITEMS AVAILABLE				
METABO: RH 65,66,99,99X,1128S,29S,30S,31S	SPLINE	19-20	15	22	7-8	27-28
METABO: 6010,6018,6020,6026,1115S	SDS	13-14	-	22	7	27-28
METABO: RH 65,90,90X,1126S,1130A	HEX-9/16	25	-	22	-	-
METABO: RH 45, 1116	ROPE THREAD	-	-	-	-	-
MILLER FALLS: SP499K	HEX-9/16	23	15	22	-	-
MILWAUKEE: 5341,42,43,44,47,48,52,53	SPLINE	19-20	15	22	7-8	27-28
MILWAUKEE: 5362,65,66,68,69	SDS	13-14	-	22	7	27-28
MILWAUKEE: 5313,15	SDS-MAX	17-18	15	22	7	27-28
MILWAUKEE: 5300,05,10,14,15	HEX-7/16	23	15	22	-	-
MILWAUKEE: 5325,26	HEX-9/16	23	15	22	-	-
MITSUBISHI: HD-25C-1,HD-38C-1	HEX-1/2	-	-	-	-	-
OUTIFIX: OX 260,OX 360	SPLINE	19-20	15	22	7-8	27-28
OUTIFIX: OX 1000	HEX-3/4	-	-	-	-	27-28
PEUGEOT: PM26,PM38	SPLINE	19-20	15	22	7-8	27-28
PHILLIPS: 747-2,RH 747	SPLINE	19-20	15	22	7-8	27-28
PHILLIPS: 555,715,510	SDS	13-14	-	22	7	27-28
PHILLIPS: 700,747-39	HEX-9/16	158	-	22	-	-
PORTER CABLE: 639	SDS	13-14	-	22	7	27-28
PORTER CABLE: 1602	HEX-9/16	23	15	22	-	-
RAMSET: 442,445,475	SPLINE	19-20	15	22	7-8	27-28
RAMSET: 325,425,612,718	SDS	13-14	-	22	7	27-28
RAMSET: 330	SDS-UNIV	16	-	22	7	27-28
RAMSET: 340,342,345,360,375,640	TRI-FLAT	-	-	-	-	-
RAMSET: 620	HEX-3/8	24	-	22	-	-
RAMSET: 650	HEX-9/16	25	-	22	-	-
REDHEAD: 747-2	SPLINE	19-20	15	22	7-8	27-28
REDHEAD: 555,715,510	SDS	13-14	-	22	7	27-28
REDHEAD: 700,747-39	HEX-9/16	25	-	22	-	-
ROCKWELL: 602,606,616,1602	HEX-9/16	23	15	22	-	-
ROCKWELL: 605,607,637,750,750X,60	HEX-1/2	-	15	22	-	-
ROCKWELL: 600,601,1600	HEX-3/8	24	-	22	-	-
RYOBI: ED382P,ER382,ED350K	SPLINE	19-20	15	22	7-8	27-28
RYOBI: ED211,ED220A,ED160	SDS	13-14	-	22	7	27-28
RYOBI: CH 485 PK	HEX-M21	26	-	-	-	-
RYOBI: ED250A,380,381,CH 450PK,460PK	HEX-1/2	-	-	-	-	-
SHRAM AIR HAMMER:	HEX-7/8	-	-	-	-	-
SIMBI: 9R2	HEX	-	-	-	-	-
SKIL: 1740,718H,6855	SDS	13-14	-	22	7	27-28
SKIL: 736,1770	HEX-3/4	158	-	22	-	-
SKIL: 628,728,731,732,1760	HEX-9/16	23	15	22	-	-
SKIL: 726	HEX-7/16	23	15	22	-	-
SKIL: 706,707,708,1706,511	HEX-3/8	24	-	22	-	-
SKIL: 717, 1750,719,718	HEX-7/16	24	-	22	-	-
SPIT: 324VE,321,325,332	SDS-UNIV	16	-	22	7	27-28
SPIT: 355,385,455	SDS-MAX	17-18	15	22	7-8	27-28
SPIT: 342	TRI-FLAT	-	-	-	-	-
SPIT: 345,375,400 S	TRI-FLAT	-	-	-	-	-
SPIT: 400	HEX-M19	-	-	-	-	-
STANLEY: HD20,HD45	HEX-3/4	25	-	22	-	-
STAR: P80-32/38	SPLINE	19-20	15	22	7-8	27-28
TECNEDIL: TH95	HEX	-	-	-	-	-
TOKU: THD-7	SPLINE	19-20	15	22	7-8	27-28
TOKU: TH-7	HEX	-	-	-	-	-
TOSHIBA: RH-38E	HEX-1/2	-	-	-	-	-
TOSHIBA: RHV-20RI, RHV-26A	SDS	13-14	-	22	-	27-28
TOUTES: MARTEAUX 2 á 4 KG	SDS	13-14	-	22	7	27-28
UNIFIX: UT24	HEX	-	-	-	-	-
UPAT: T1534,1562,1562DS,1538S	SPLINE	19-20	15	22	7-8	27-28
UPAT: T1716E	SDS	13-14	-	22	5	27-28
WACKER: 11/110	SPLINE	19-20	15	22	7-8	27-28
WACKER: EBH-75M	SDS-MAX	17-18	15	22	7	27-28
WACKER: EHB 10/100,10/220,EH8/220 BHB14 EHL 8Y/42, EHUB-10Y	HEX-3/4	-	-	22	-	-
WURTH: H16	SDS	13-14	-	22	7	27-28

ICS Cutting Tools, Inc.



SCAN FOR LATEST ONLINE CATALOGS



SCAN TO OPEN THE WEBSITE



ICS CUTTING TOOLS, INC
511 MAIN STREET • CASCO, WI 54205-0125 USA

(920) 837-2526 • FAX (920) 837-2530
www.icscuttingtools.com • info@icscuttingtools.com