

HIGH SPEED STEEL 1/4" HEX SHANK DRILLS

ICS USA

GENERAL PURPOSE

118° POINT



Hex Shank Drills are designed for use in cordless screwdrivers, handheld drills, and impact tools. Hex shank has a recessed snap-in ring to lock drills into drill chuck. For general purpose drilling.

SIZE	DEC. EQUIV.	FLUTE LENGTH	OVERALL LENGTH	ITEM NO.	PRICE
1/16	.0625	7/8	2-9/16	QHSD004	2.50
5/64	.0781	1	2-5/8	QHSD005	2.54
3/32	.0938	1-3/16	2-3/4	QHSD006	2.70
7/64	.1094	1-1/4	2-7/8	QHSD007	2.76
1/8	.1250	1-5/16	3	QHSD008	2.88
9/64	.1406	1-7/16	3-1/16	QHSD009	2.98
5/32	.1562	1-1/2	3-3/16	QHSD010	3.20
3/16	.1875	1-5/8	3-3/8	QHSD012	3.60

SIZE	DEC. EQUIV.	FLUTE LENGTH	OVERALL LENGTH	ITEM NO.	PRICE
7/32	.2188	1-3/4	3-3/4	QHSD014	4.50
1/4	.2500	2	3-13/16	QHSD016	5.00
9/32	.2812	2-15/16	4-1/4	QHSD018	6.00
5/16	.3125	3-3/16	4-1/2	QHSD020	6.54
3/8	.3750	3-5/8	5	QHSD024	8.70
7/16	.4375	4-1/16	5-1/2	QHSD028	10.00
1/2	.5000	4-1/2	6	QHSD032	12.40

HIGH SPEED STEEL 1/4" HEX SHANK DRILLS

ICS USA

HEAVY DUTY

135° SPLIT POINT



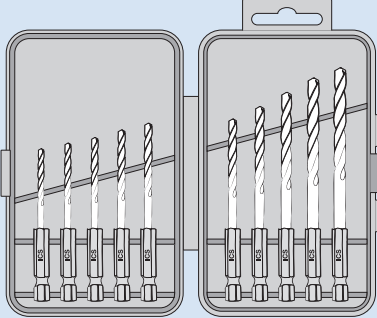
Hex Shank Drills are designed for use in cordless screwdrivers, handheld drills, and impact tools. Hex shank has a recessed snap-in ring to lock drills into drill chuck.

SIZE	DEC. EQUIV.	FLUTE LENGTH	OVERALL LENGTH	ITEM NO.	PRICE
1/16	.0625	7/8	2-9/16	QHSDH004	3.20
5/64	.0781	1	2-5/8	QHSDH005	3.20
3/32	.0938	1-3/16	2-3/4	QHSDH006	3.20
7/64	.1094	1-1/4	2-7/8	QHSDH007	3.00
1/8	.1250	1-5/16	3	QHSDH008	3.00
9/64	.1406	1-7/16	3-1/16	QHSDH009	3.00
5/32	.1562	1-1/2	3-3/16	QHSDH010	3.20
3/16	.1875	1-5/8	3-3/8	QHSDH012	4.00

SIZE	DEC. EQUIV.	FLUTE LENGTH	OVERALL LENGTH	ITEM NO.	PRICE
7/32	.2188	1-3/4	3-3/4	QHSDH014	4.86
1/4	.2500	2	3-13/16	QHSDH016	5.30
9/32	.2812	2-15/16	4-1/4	QHSDH018	6.36
5/16	.3125	3-3/16	4-1/2	QHSDH020	6.84
3/8	.3750	3-5/8	5	QHSDH024	8.96
7/16	.4375	4-1/16	5-1/2	QHSDH028	10.30
1/2	.5000	4-1/2	6	QHSDH032	12.70

1/4" HEX SHANK DRILL SETS

PLASTIC INDEX

DESCRIPTION	TYPE OF DRILL	ITEM NO.	PRICE
10 PC DRILL SETS Sizes 1/16 to 5/32 by 64ths 3/16 to 1/4 by 32nds  (Wt. .40 lbs.)	1/4" Hex Shank Drills - 118° Standard Point	DS-QHSD-10	39.32
	1/4" Hex Shank Drills - 135° Split Point	DS-QHSDH-10	43.84