

COBALT

125B

THREADED SHANK ADAPTER DRILLS


ICS USA

HEAVY DUTY

135° SPLIT POINT

NAS 965, TYPE D SPECIFICATIONS

1/4 - 28
THREAD

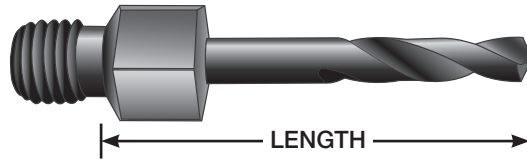

Type "D" Cobalt Threaded Shank Adapter Drills are used for heavy duty drilling in hard, tough tensile strength materials in confined areas. They are manufactured with true concentricity for more accurate holes. They are often referred to as Snake Drills.

DEC. SIZE	EQUIV.	ITEM NO.	PRICE	DEC. SIZE	EQUIV.	ITEM NO.	PRICE	DEC. SIZE	EQUIV.	ITEM NO.	PRICE
VERY STUB LENGTH 1/2"				STUB LENGTH 1/2" - 5/8"				LONG LENGTH 2-1/8"			
#2	.2210	TSADCVS#02	6.40	3/32	.0938	TSADCSM006	4.10	#2	.2210	TSADCL#02	5.26
#5	.2055	TSADCVS#05	6.20	1/8	.1250	TSADCSM008	4.30	#3	.2130	TSADCL#03	7.24
#7	.2010	TSADCVS#07	6.20	5/32	.1562	TSADCSM010	4.52	#5	.2055	TSADCL#05	6.10
#8	.1990	TSADCVS#08	6.20	3/16	.1875	TSADCSM012	4.94	#7	.2010	TSADCL#07	5.14
#10	.1935	TSADCVS#10	5.98	7/32	.2188	TSADCSM014	5.26	#8	.1990	TSADCL#08	5.98
#11	.1910	TSADCVS#11	5.98	1/4	.2500	TSADCSM016	5.04	#10	.1935	TSADCL#10	5.04
#13	.1850	TSADCVS#13	5.98	"D"	.2460	TSADCSM"D"	5.04	#11	.1910	TSADCL#11	5.04
#16	.1770	TSADCVS#16	5.88	"F"	.2570	TSADCSM"F"	5.26	#12	.1890	TSADCL#12	6.82
#19	.1660	TSADCVS#19	5.88	SHORT LENGTH 1-1/4"				#13	.1850	TSADCL#13	4.94
#20	.1610	TSADCVS#20	5.88	#2	.2210	TSADCS#02	4.80	#16	.1770	TSADCL#16	4.84
#21	.1590	TSADCVS#21	5.88	#5	.2055	TSADCS#05	5.56	#19	.1660	TSADCL#19	4.58
#27	.1440	TSADCVS#27	5.72	#7	.2010	TSADCS#07	4.70	#20	.1610	TSADCL#20	4.58
#30	.1285	TSADCVS#30	5.64	#8	.1990	TSADCS#08	5.46	#21	.1590	TSADCL#21	4.58
#40	.0980	TSADCVS#40	5.36	#10	.1935	TSADCS#10	4.58	#27	.1440	TSADCL#27	4.52
3/32	.0938	TSADCVS006	5.34	#11	.1910	TSADCS#11	4.58	#30	.1285	TSADCL#30	4.42
1/8	.1250	TSADCVS008	5.62	#12	.1890	TSADCS#12	6.30	#40	.0980	TSADCL#40	4.30
5/32	.1562	TSADCVS010	5.78	#13	.1850	TSADCS#13	4.58	3/32	.0938	TSADCL006	4.28
3/16	.1875	TSADCVS012	5.98	#16	.1770	TSADCS#16	4.44	1/8	.1250	TSADCL008	4.52
1/4	.2500	TSADCVS016	6.52	#19	.1660	TSADCS#19	4.44	9/64	.1406	TSADCL009	4.52
"D"	.2460	TSADCVS"D"	6.52	#20	.1610	TSADCS#20	4.44	5/32	.1562	TSADCL010	4.58
"F"	.2570	TSADCVS"F"	6.82	#21	.1590	TSADCS#21	4.44	11/64	.1719	TSADCL011	4.94
STUB LENGTH 1/2" - 5/8"				#27	.1440	TSADCS#27	4.10	3/16	.1875	TSADCL012	4.94
#2	.2210	TSADCSM#02	4.94	#30	.1285	TSADCS#30	3.78	7/32	.2188	TSADCL014	6.20
#3	.2130	TSADCSM#03	6.10	#40	.0980	TSADCS#40	3.78	1/4	.2500	TSADCL016	5.36
#5	.2055	TSADCSM#05	5.14	3/32	.0938	TSADCS006	3.78	"D"	.2460	TSADCL"D"	5.36
#7	.2010	TSADCSM#07	4.84	1/8	.1250	TSADCS008	3.88	"F"	.2570	TSADCL"F"	5.56
#8	.1990	TSADCSM#08	4.84	9/64	.1406	TSADCS009	4.20	EXTRA LENGTH 3"			
#10	.1935	TSADCSM#10	4.62	5/32	.1562	TSADCS010	4.20	#13	.1850	TSADCXL#13	8.46
#11	.1910	TSADCSM#11	5.88	11/64	.1719	TSADCS011	4.72	#20	.1610	TSADCXL#20	7.10
#12	.1890	TSADCSM#12	5.88	3/16	.1875	TSADCS012	4.62	#30	.1285	TSADCXL#30	6.52
#13	.1850	TSADCSM#13	4.62	7/32	.2188	TSADCS014	5.68	5/32	.1562	TSADCXL010	7.76
#16	.1770	TSADCSM#16	4.52	1/4	.2500	TSADCS016	5.00	3/16	.1875	TSADCXL012	8.20
#19	.1660	TSADCSM#19	4.52	"D"	.2460	TSADCS"D"	4.94	"F"	.2570	TSADCXL"F"	9.46
#20	.1610	TSADCSM#20	4.52	"F"	.2570	TSADCS"F"	5.22				
#21	.1590	TSADCSM#21	4.52								
#27	.1440	TSADCSM#27	4.42								
#30	.1285	TSADCSM#30	4.42								
#40	.0980	TSADCSM#40	4.10								

NOTE: Different sizes, lengths and thread sizes are available. Inquire for pricing.