


# HIGH SPEED STEEL SINGLE ANGLE (SHANK) CUTTERS

ICS USA

GENERAL PURPOSE

PERIPHERAL CUTTING EDGES

WELDON SHANK

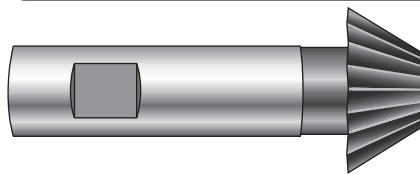

RIGHT HAND CUT

Single Angle Cutters are designed for chamfering or beveling parts, e.g., a 60° cutter can be used to mill a 30° angle. They can be used on manual or CNC machining centers. They are ground for cutting steel.

CUTTER DIAMETER	ANGLE (SINGLE)	CUTTER WIDTH	SHANK DIAMETER	OVERALL LENGTH	ITEM NO.	PRICE
1/2	45°	1/8	3/8	2-1/8	SASC45-032	48.64
3/4		3/16	3/8	2-1/8	SASC45-048	63.06
1		5/16	1/2	2-1/2	SASC45-100	72.66
1-1/2		1/2	3/4	2-3/4	SASC45-132	92.18
1/2	60°	7/32	3/8	2-1/8	SASC60-032	48.64
3/4		5/16	3/8	2-1/8	SASC60-048	63.06
1		7/16	1/2	2-1/2	SASC60-100	72.66
1-1/2		5/8	3/4	2-3/4	SASC60-132	92.18


# HIGH SPEED STEEL DOUBLE ANGLE (SHANK) CUTTERS

ICS USA

GENERAL PURPOSE

PERIPHERAL CUTTING EDGES

WELDON SHANK

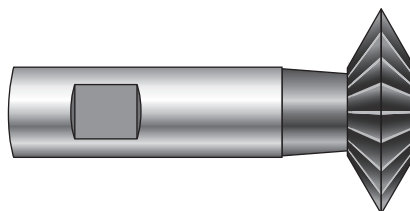

RIGHT HAND CUT

Double Angle Cutters are designed for milling threads, V-grooves, serrations, and other angular surfaces. These cutters can mill a double angle cut in one pass and can be used on manual or CNC machining centers. They are ground for cutting steel.

CUTTER DIAMETER	ANGLE (DOUBLE)	CUTTER THICKNESS	SHANK DIAMETER	OVERALL LENGTH	ITEM NO.	PRICE
3/4	60°	3/16	3/8	2-3/8	DASC60-048	52.44
1		5/16	1/2	2-27/32	DASC60-100	61.32
1-3/8		7/16	5/8	3-7/32	DASC60-124	81.20
1-1/2		1/2	5/8	3-3/8	DASC60-132	88.54
1-7/8		5/8	3/4	3-25/32	DASC60-156	98.78
2-1/4		3/4	7/8	4-5/32	DASC60-216	130.84
2-1/4		1/2	3/4	3-1/8	DASC60-216A	125.98
3/4	90°	1/4	3/8	2-7/16	DASC90-048	52.44
1		3/8	1/2	2-29/32	DASC90-100	61.32
1-3/8		1/2	5/8	3-9/32	DASC90-124	81.20
1-1/2		9/16	5/8	3-7/16	DASC90-132	88.54
1-7/8		5/8	3/4	3-25/32	DASC90-156	95.78
2-1/4		3/4	7/8	4-5/32	DASC90-216	150.00
2-1/4		1/2	3/4	3-1/8	DASC90-216A	125.98