

# MACHINISTS' (AMERICAN PATTERN) FILES


ICS

WIS

SPECIAL PURPOSE

CHISEL CUT

## FLAT HAND FILES

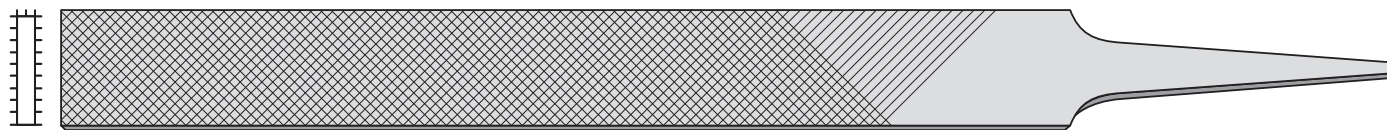

BLACK TANG



BLACK OXIDE FINISH



WITH HANDLE

Flat Hand Files are designed for safe filing of internal corners and where metal must be removed rapidly. One edge is uncut or "safe" for filing one surface without damaging an adjoining one. They are double cut on both sides and one edge, and parallel in width. Similar to Flat Taper Files but taper in thickness and have one safe edge.

LENGTH x WIDTH x THICKNESS	CUT	ITEM NO.		ITEM NO.		ITEM NO.		WEIGHT	
		BLACK TANG	PRICE EACH	BLACK OXIDE	PRICE EACH	FILE WITH HANDLE	PRICE EACH	STD. PKG.	PER DOZ. (lbs.)
4 x 15/32 x 3/32	Bastard Cut	F-H-04B	3.62	FO-H-04B	3.72	FH-H-04B	4.80	12	0.9
6 x 39/64 x 5/32		F-H-06B	3.70	FO-H-06B	3.82	FH-H-06B	4.88	12	1.6
8 x 25/32 x 13/64		F-H-08B	5.18	FO-H-08B	5.40	FH-H-08B	6.70	12	4.3
10 x 31/32 x 1/4		F-H-10B	6.52	FO-H-10B	6.74	FH-H-10B	8.02	12	7.1
12 x 1-5/32 x 9/32		F-H-12B	10.32	FO-H-12B	10.68	FH-H-12B	11.84	12	11.9
14 x 1-11/32 x 5/16		F-H-14B	13.64	FO-H-14B	14.00	FH-H-14B	15.16	6	17.8
4 x 15/32 x 3/32	Second Cut	F-H-04SC	3.70	FO-H-04SC	3.82	FH-H-04SC	4.88	12	0.9
6 x 39/64 x 5/32		F-H-06SC	4.08	FO-H-06SC	4.20	FH-H-06SC	5.26	12	1.6
8 x 25/32 x 13/64		F-H-08SC	5.56	FO-H-08SC	6.26	FH-H-08SC	7.10	12	4.3
10 x 31/32 x 1/4		F-H-10SC	7.12	FO-H-10SC	7.36	FH-H-10SC	8.66	12	7.1
12 x 1-5/32 x 9/32		F-H-12SC	11.06	FO-H-12SC	11.40	FH-H-12SC	12.58	12	11.9
14 x 1-11/32 x 5/16		F-H-14SC	14.62	FO-H-14SC	14.98	FH-H-14SC	16.16	6	17.8
4 x 15/32 x 3/32	Smooth Cut	F-H-04SM	4.44	FO-H-04SM	4.56	FH-H-04SM	5.62	12	0.9
6 x 39/64 x 5/32		F-H-06SM	4.66	FO-H-06SM	4.80	FH-H-06SM	5.84	12	1.6
8 x 25/32 x 13/64		F-H-08SM	6.04	FO-H-08SM	6.26	FH-H-08SM	7.56	12	4.3
10 x 31/32 x 1/4		F-H-10SM	8.06	FO-H-10SM	8.30	FH-H-10SM	9.58	12	7.1
12 x 1-5/32 x 9/32		F-H-12SM	11.90	FO-H-12SM	12.24	FH-H-12SM	12.24	12	11.9
14 x 1-11/32 x 5/16		F-H-14SM	15.44	FO-H-14SM	15.80	FH-H-14SM	16.98	6	17.8

## IGNITION POINT FILES



Ignition Point Files are designed for dressing tungsten connector points, spark plugs, electrical switches and relays. They are double cut on both sides with two uncut "safe" edges to protect adjacent surfaces.

LENGTH x THICKNESS	CUT	ITEM NO.	STD. PKG.	WEIGHT PER DOZ.
5-1/4 x .044	Smooth	GRAY FINISH F-IP-05	EACH 6.20	10 .030